


MECHANICAL OUTLINE, UNIT:mm
(Unspecified Tolerances is: ±0.3 mm)


REV	DESCRIPTION:	DATE
V0	新发行	2024.08.7

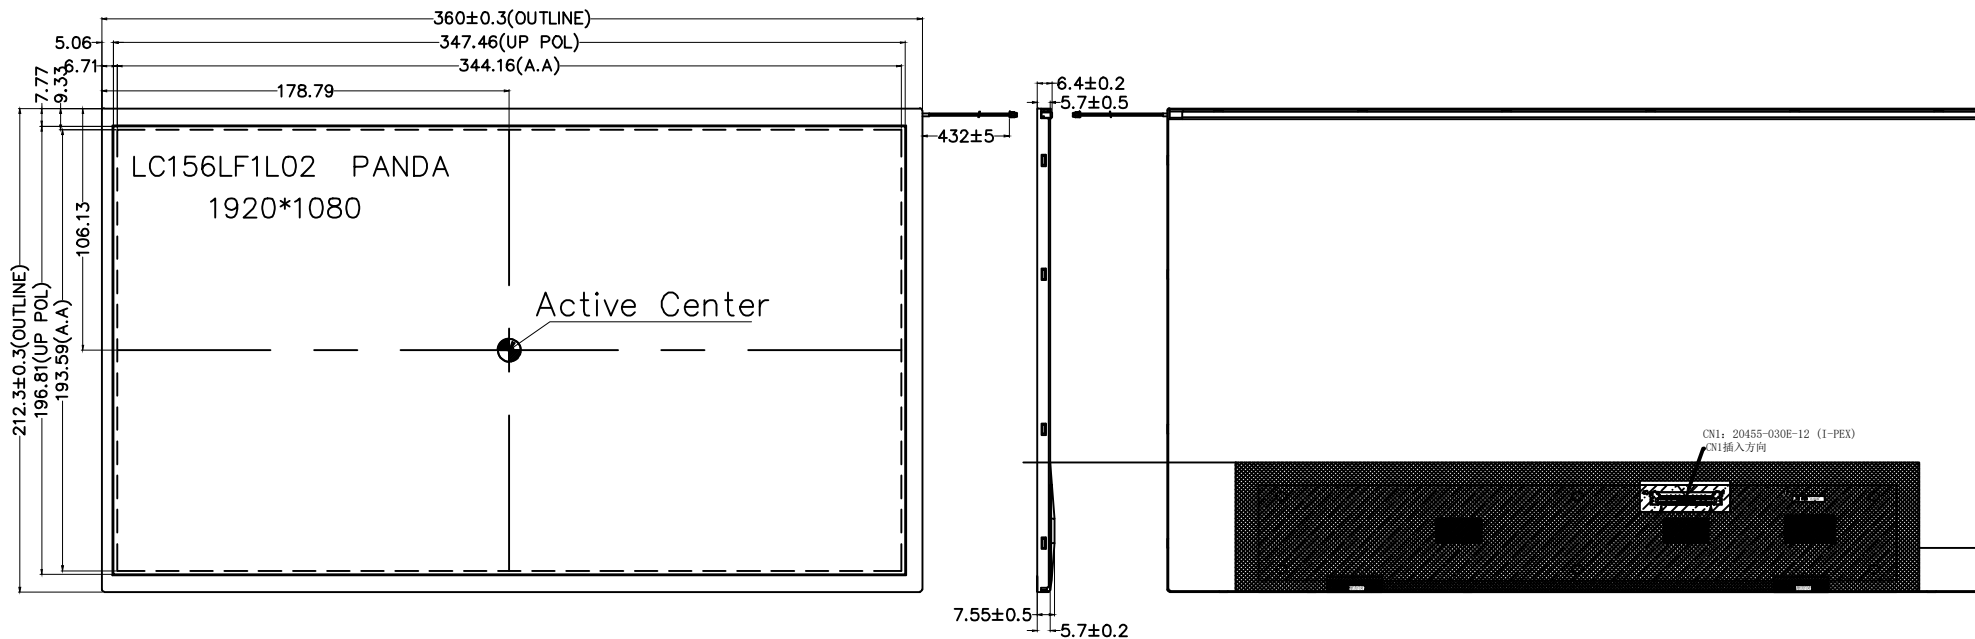

电路原理图: 10串X6并=60 LED

ELECTRICAL-OPTICAL CHARACTERISTICS
(Ta=25°C. The Ambient temperature Ta=25°C)

Item	Symbol	Condition	min.	typ.	max.	Unit
Forward Current	U	If= 480 mA		30		V
Reverse Current	Ir	Vr= 5 V			10	μA
Power dissipation	Pd	If= 480 mA			5.04	W
Colour Coordinates	λ	If= 480 mA	LBD		LBD	
BL Luminance (Center Area)	Lv	If= 480 mA	--	--		cd/m²
Luminous Uniformity		If= 480 mA	70	75		%
LCM Luminance (reference???)	Lv	If= 480 mA	--	1000	--	cd/m²
Operating Temperature Range	Topr	normal use	-10		+60	°C
Storage Temperature Range	Tstg	normal use	-20		+70	°C

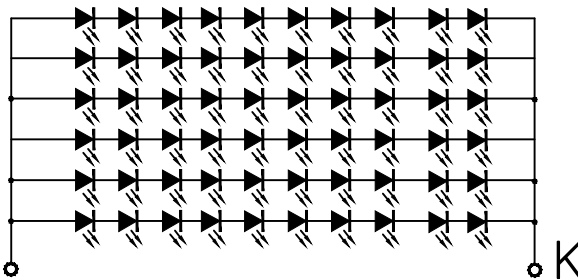

深圳市宇华微科技有限公司 PRODUCT NAME: 产品名称 G156FA03-LK01		CUST NUMBER: 客户型号 PROJECTION 三角		SHEET: 页次 1 of 1 APPROVALS 签字 DESIGN: 设计 CHECK: 核对 APPROVE: 批准	SCALE: 比例 DATE 日期
		G156FA03-LK01			