

- Tentative Specification
- Preliminary Specification
- Approval Specification

MODELNAME:YH101BS5002

Version:RA01


| | |
|---------------------------------------------------------------------------------------|------------------|
| Customer: Common | |
| APPROVED BY | SIGNATURE |
| <u>Name / Title</u> Note | _____ |
| _____ Please return 1 copy for your confirmation with your signature and comments. | |

| Approved By | Checked By | Prepared By |
|-------------|------------|-------------|
| | | |

1. PHYSICAL DATA

| Item | Contents | Unit |
|---------------------|---------------------------|-----------------|
| LCD type | TFT TRANSMISSIVE | --- |
| Viewing direction | ALL | o'clock |
| Module size (W×H×T) | 235 × 143 × 5.1 | mm ³ |
| Active area(W×H) | 222.72×125.28 | mm ² |
| Number of dots(W×H) | 1024(RGB) × 600 | dots |
| Pixel Pitch(H×V) | 0.2175×0.2088 | mm |
| DriverIC | HX828-A11 | --- |
| Colors | 16.7M | --- |
| Backlight Type | 42 white leds 9.6V /280mA | --- |
| Interface Type | RGB | --- |
| Display Model | Normally Black | --- |

2. BLOCK DIAGRAM

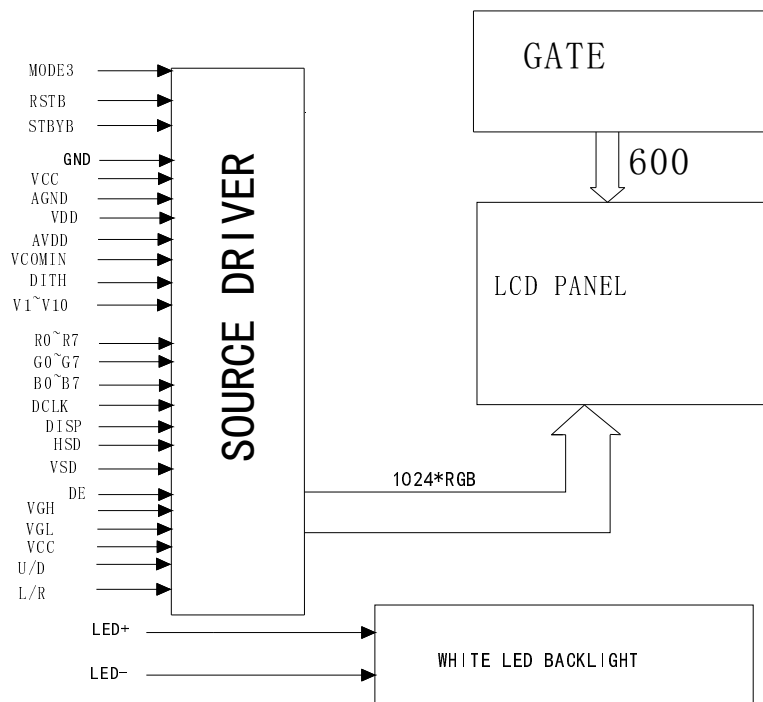

4. Pin Descriptions

| Pin No. | Symbol | Functional |
|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | LED A | LED Anode |
| 2 | LED A | LED Anode |
| 3 | LED K | LED Cathode |
| 4 | LED K | LED Cathode |
| 5 | GND | Digital Ground |
| 6 | NC | NC |
| 7 | DVDD | Digital Power |
| 8 | MODE | DE/SYNC mode select MODE=H: DE mode(normally pull high) MODE=L: HSD/VSD mode |
| 9 | DE | Data enable signal |
| 10 | VSYNC | Vertical sync input.Negative polarity |
| 11 | HSYNC | Horizontal sync input.Negative polarity |
| 12~19 | B7~B0 | Blue data Input |
| 20~27 | G7~G0 | Green data Input |
| 28~35 | R7~R0 | Red data Input |
| 36 | GND | Digital Ground |
| 37 | DCLK | Clock input |
| 38 | GND | Digital Ground |
| 39 | L/R | Source right or left sequence control SHLR=H: right shift, Left → Right SHLR=L: left right, Right → Left |
| 40 | U/D | Gate up or down scan control UPDN=H: up shift, Down → Up UPDN=L: down shift, Up → Down |
| 41 | VGH | Positive Power for TFT |
| 42 | VGL | Negative Power for TFT |
| 43 | AVDD | Analog Power |
| 44 | RSTB | Global reset pin.Active low to enter reset state Suggest to connecting with an RC reset circuit for stability. Normally pull high. (RC circuit :R=10K Ω , C=1uF) |
| 45 | NC | Not connect |
| 46 | NC | NC |
| 47 | DITHB | Dithering setting |
| 48 | GND | Digital Ground |
| 49 | NC | Not connect |
| 50 | NC | Not connect |

5. LCD MODULE PARAMETER

5.1 Absolute maximum ratings

| Parameter | Symbol | Min | Max | Unit |
|-----------------------|------------------|------|-------|------|
| Power supply1 | V _{DD} | -0.5 | +3.96 | V |
| Power supply2 | Avdd | -0.5 | +13.5 | V |
| Operating temperature | T _{OPR} | -20 | 70 | °C |
| Storage temperature | T _{STG} | -30 | 80 | °C |

5.2 Input voltage refer list

| Parameter | Symbol | Value | Unit | Remarks |
|------------------------------|--------|-------|------|---------|
| TFT Gate ON Voltage | VGH | 21 | V | |
| TFT Gate Off Voltage | VGL | -8 | V | |
| Analog Power Supply Voltage | AVDD | 10.3 | V | |
| TFT Common Electrode Voltage | VCOM | 4.4 | V | NOTE |

Note: Please adjust Vcom to make the flicker level be minimum

6. DC ELECTRICAL CHARACTERISTICS

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-------------------------------------|--------|------------------------------------------------------------|----------|--------|----------|------|
| Low level input voltage | Vil | For the digital circuit | 0 | - | 0.3×VDD | V |
| High level input voltage | Vih | For the digital circuit | 0.7×VDD | - | VDD | V |
| Input leakage current | Ii | For the digital circuit | - | - | ±1 | μA |
| High level output voltage | Voh | Ioh= -400 μA | VDD-0.4 | - | - | V |
| Low level output voltage | Vol | Iol= +400 μA | - | - | GND+0.4 | V |
| Pull low/high resistor | Ri | For the digital input pin @ VDD=3.3V | 200K | 250K | 300K | ohm |
| Digital Operation current | Idd | Fclk=65 MHz, FLD=50KHz, VDD=3.3V | - | 15 | 25 | mA |
| Digital Stand-by current | Ist1 | Clock and all functions are stopped | - | 10 | 50 | μA |
| Analog Operating Current | Idda | No Ipad, Fclk=65MHz, FLD=50KHz @ AVDD=10V, V1=8V, V14=0.4V | - | 10 | 12 | mA |
| Analog Stand-by current | Ist2 | No load, Clock and all functions are Stopped | - | 10 | 50 | μA |
| Input level of V1 ~ V7 | Vref1 | Gamma correction voltage input | 0.4*AVDD | - | AVDD-0.1 | V |
| Input level of V8 ~ V14 | Vref2 | Gamma correction voltage input | 0.1 | - | 0.6*AVDD | V |
| Output Voltage deviation | Vod1 | Vo = AVSS+0.1V ~ AVSS+0.5V and Vo = AVDD-0.5V ~ AVDD-0.1V | - | ±20 | ±35 | mV |
| Output Voltage deviation | Vod2 | Vo = AVSS+0.5V ~ AVDD-0.5V | - | ±15 | ±20 | mV |
| Output Voltage Offset between Chips | Voc | Vo = AVSS+0.5V ~ AVDD-0.5V | - | - | ±20 | mV |
| Dynamic Range of Output | Vdr | SO1 ~ SO1536 | 0.1 | - | AVDD-0.1 | V |
| Sinking Current of Outputs | IOLy | SO1 ~ SO1536; Vo=0.1V v.s 1.0V , AVDD=13.5V | 80 | - | - | uA |
| Driving Current of Outputs | IOHy | SO1 ~ SO1536; Vo=13.4V v.s 12.5V , AVDD=13.5V | 80 | - | - | uA |
| Resistance of Gamma Table | Rg | Rn: Internal gamma resistor | 0.7*Rn | 1.0*Rn | 1.3*Rn | ohm |

7. TTL MODE AC ELECTRICAL CHARACTERISTICS

TTL mode

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|-----------------------------------|------|------|------|------|
| VDD Power On Slew rate | TPOR | From 0V to 90% VDD | 1 | - | 20 | ms |
| RST pulse width | TRST | DCLK = 65MHz | 50 | - | - | us |
| DCLK cycle time | Tcph | - | 14 | - | - | ns |
| DCLK pulse duty | Tcwh | - | 40 | 50 | 60 | % |
| VSD setup time | Tvst | - | 5 | - | - | ns |
| VSD hold time | Tvhd | - | 5 | - | - | ns |
| HSD setup time | Thst | - | 5 | - | - | ns |
| HSD hold time | Thhd | - | 5 | - | - | ns |
| Data set-up time | Tdsu | D0[7:0], D1[7:0], D2[7:0] to DCLK | 5 | - | - | ns |
| Data hold time | Tdhd | D0[7:0], D1[7:0], D2[7:0] to DCLK | 5 | - | - | ns |
| DE setup time | Tesu | - | 5 | - | - | ns |
| DE hold time | Tehd | - | 5 | - | - | ns |
| Output stable time | Tsst | Dual gate | - | - | 3 | us |

8. Data input format for RGB

DE mode

DE mode

| Parameter | Symbol | Value | | | Unit |
|---------------------------------|----------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| DCLK frequency @Frame rate=60hz | fclk | 40.8 | 51.2 | 67.2 | Mhz |
| Horizontal display area | thd | 1024 | | | DCLK |
| HSYNC period time | th | 1114 | 1344 | 1400 | DCLK |
| HSYNC blanking | thb+thfp | 90 | 320 | 376 | DCLK |
| Vertical display area | tvd | 600 | | | H |
| VSYNC period time | tv | 610 | 635 | 800 | H |
| VSYNC blanking | tvb+tvfp | 10 | 35 | 200 | H |

HV mode(1)

| HV mode Horizontal input timing | | | | | | |
|------------------------------------|------|--------|-------|------|------|------|
| Parameter | | Symbol | Value | | | Unit |
| Horizontal display area | | thd | 1024 | | | DCLK |
| DCLK frequency@ Frame rate=60hz | | fclk | Min. | Typ. | Max. | Mhz |
| | | | 44.9 | 51.2 | 63 | |
| 1 Horizontal Line | | th | 1200 | 1344 | 1400 | DCLK |
| HSYNC pulse width | Min. | thpw | 1 | | | |
| | Typ. | | - | | | |
| | Max. | | 140 | | | |
| HSYNC back porch | | thbp | 160 | 160 | 160 | |
| HSYNC front porch | | thfp | 16 | 160 | 216 | |

HV mode(2)

| Vertical input timing | | | | | |
|-----------------------|--------|-------|------|------|------|
| Parameter | Symbol | Value | | | Unit |
| | | Min. | Typ. | Max. | |
| Vertical display area | tvd | 600 | | | H |
| VSYNC period time | tv | 624 | 635 | 750 | H |
| VSYNC pulse width | tpw | 1 | - | 20 | H |
| VSYNC back porch | tvb | 23 | 23 | 23 | H |
| VSYNC front porch | tvfp | 1 | 12 | 127 | H |

9. Backlight Characteristic


| Item | Symbol | Min | Typical | Max | Unit |
|------------------------------------------|------------------------|-----------|------------|-----|-----------|
| LED module Forward voltage | V_{LED} | -- | 9.6 | -- | V |
| LED module current | I_{LED} | -- | 280 | -- | mA |
| LCM Surface Luminance ★1 | L_s | 250 | 300 | -- | mcd |
| LCM Surface brightness uniform ★2 | L_D | 80 | -- | -- | % |

★ 1 Test condition is:

- (a) Center point on active area.
- (b)Best Contrast.

★2 Uniform measure condition:

- (1)Measure 9 point. Measure location show below;
- (2)Uniform=(Min. brightness /Max. brightness)*100%

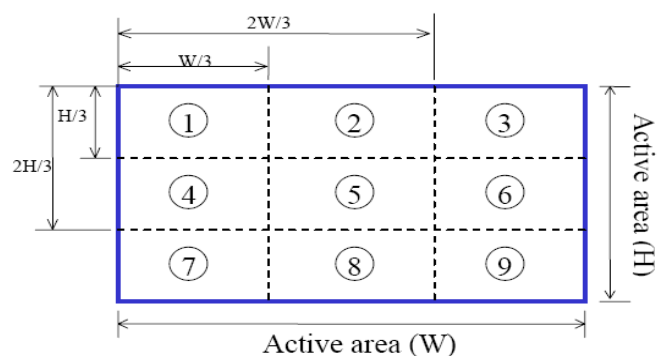

10. Electro-optical Characteristics

| Parameter | | Symbol | Condition | Min. | Typ. | Max. | Unit | Remark | | | |
|----------------------------------|------------|--------|-----------|----------------|--------------------|----------------|------|--------|----|----|--|
| Viewing Angle range | Horizontal | Θ3 | CR > 10 | - | 85 | - | Deg. | | | | |
| | | Θ9 | | - | 85 | - | Deg. | | | | |
| | Vertical | Θ12 | | - | 85 | - | Deg. | | | | |
| | | Θ6 | | - | 85 | - | Deg. | | | | |
| Luminance Contrast ratio | | CR | | - | 800 | - | | | | | |
| Cell Transmittance | | Tr | | 4.8 | 5.8 | - | % | | | | |
| White Chromaticity | | xw | Θ = 0 | TYP. - 0.03 | 0.307 | TYP. + 0.03 | | | | | |
| | | yw | | | 0.338 | | | | | | |
| Red | Rx | 0.605 | | | | | | | | | |
| | Ry | 0.336 | | | | | | | | | |
| Green | Gx | 0.297 | | | | | | | | | |
| | Gy | 0.552 | | | | | | | | | |
| Blue | Bx | 0.139 | | | | | | | | | |
| | By | 0.132 | | | | | | | | | |
| Color Gamut (C light) | | | | | | | - | 50 | - | % | |
| Response Time (Rising + Falling) | | TRT | | | Ta= 25 °C Θ = 0 | | - | 30 | 40 | ms | |

11. Reliability

11.1 Mtbf

The LCD module shall be designed to meet a minimum MTBF value of 50000 hours with normal

11.2 Test condition

| N O. | ITEM | CONDITION | CRITERION |
|------|----------------------------------------------|----------------------------------------|---------------------------------------------------------------------|
| 1 | High Temperature Non-Operating Test | 80°C *120Hrs | No Defect Of Operational Function In Room Temperature Are Allowable |
| 2 | Low Temperature Non-Operating Test | -30°C *120Hrs | |
| 3 | High Temperature/Humidity Non Operating Test | 60°C *75%RH*120Hrs | |
| 4 | High Temperature Operating Test | 70°C *120Hrs | |
| 5 | Low Temperature Operating Test | -20°C *120Hrs | |
| 6 | Thermal Shock Test | -10°C (30Min) - 50°C (30Min) *10CYCLES | |

Notes:

1. Judgments should be made after exposure in room temperature for two hours.
2. The distill water is used for the high temperature/humidity test.
3. The sample above is individually for every reliability tests condition.

12. Inspection standards

1.AQL(Acceptable Quality Level


AQL of major and minor defect.

| | | |
|-----|--------------|--------------|
| | MAJOR DEFECT | MINOR DEFECT |
| AQL | 0.65 | 1.5 |

2. Basic conditions for inspection

The LCM face to us, in normal environment, the lux is 1000 ± 200 . (Darkroom's lux: 100 ± 50), About an angle of incidence 30° , a distance of 30 cm with an angle of $45 \pm 10^\circ$ to check the products without uncovering the film!


(As shown below)

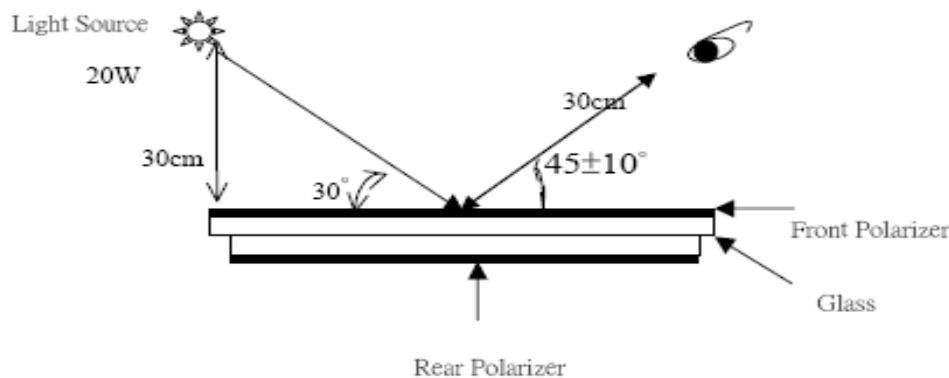


3. Inspection item and criteria


3.1 LCD appearance defect(View area)

| NO | Defect item | Criteria | | Remark |
|----|--------------------------------------------------------------|------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------|
| | | Specification | Allowable | |
| 1 | Fiber、 glass cratch、 polarizer scratch/folded (minor defect) | $W \leq 0.03\text{mm}$ | disregard | note1:L: Length, W: Width note2: disregard if out of AA |
| | | $0.03\text{mm} < W \leq 0.05\text{mm};$ $L \leq 3.0\text{mm}$ | 2 | |
| | | $0.05\text{mm} < W \leq 0.1\text{mm};$ $L \leq 3.0\text{mm}$ | 1 | |
| | | $W > 0.1\text{mm}; L > 3.0\text{mm}$ | 0 | |
| 2 | Polarizer bubble、 concave and convex (minor defect) | $\phi \leq 0.2\text{mm}$ | disregard | note1: $\phi = (L+W) / 2$, L:Length, W :Width note2:disregard if out of AA |
| | | $0.2\text{mm} < \phi \leq 0.3\text{mm}$ | 2 | |
| | | $0.3\text{mm} < \phi \leq 0.5\text{mm}$ | 1 | |
| | | $0.5\text{mm} < \phi$ | 0 | |

| | | | | |
|---|---------------------------------------------------------------|-------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------|
| 3 | Black dots、dirty dots、impurities、eye winker (minor defect) | $\phi \leq 0.15\text{mm}$ | disregard | note2:disregard if out of AA  |
| | | $0.15\text{mm} < \phi \leq 0.25\text{mm}$ | 2 | |
| | | $0.25\text{mm} < \phi \leq 0.3\text{mm}$ | 1 | |
| | | $0.3\text{mm} < \phi$ | 0 | |
| 4 | Polarizer prick (minor defect) | $\phi \leq 0.1\text{mm}$ | disregard | note1: $\phi = (L+W)/2$, L=Length, W=Width |
| | | $0.1\text{mm} < \phi \leq 0.25\text{mm}$ | 3 | |
| | | $\phi > 0.25\text{mm}$ | 0 | note2:the distance between two dots>5mm |

3.2Electrical criteria

| NO | Defect item | Criteria | Remark | |
|----|-------------------------------------------------------------|-------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------|
| 1 | No display (major defect) | No display 【Reject】 | | |
| 2 | Missing line (major defect) | Missing line 【Reject】 | | |
| 3 | Seg-com light and dark (major defect) | Seg-com light and dark 【Reject】 | ND filter 2% test | |
| 4 | No display in immobility (major defect) | No display in immobility 【Reject】 | | |
| 5 | Flicker of Pattern (major defect) | Flicker of Pattern 【Reject】 | | |
| 6 | Mura (major defect) | ND filter 2%test | | |
| 7 | Over current (major defect) | Over current 【Reject】 | | |
| 8 | Voltage out of specification (major defect) | Voltage out of specification 【Reject】 | | |
| 9 | Pattern blur, error code (major defect) | Pattern blur, error code 【Reject】 | | |
| 10 | Dark light, Flicker (major defect) | Dark light, Flicker 【Reject】 | | |
| 11 | Black/white dots 、 Dirty dots、 eye winker (major defect) | Specification | Allowable | Note1:disregard if out of AA  |
| | | $\phi \leq 0.15\text{mm}$ | disregard | |
| | | $0.15\text{mm} < \phi \leq 0.25\text{mm}$ | 2 | |
| | | $0.25\text{mm} < \phi \leq 0.3\text{mm}$ | 1 | |
| | $0.3\text{mm} < \phi$ | 0 | | |
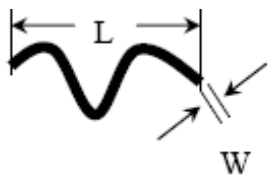
| | | | | |
|----|--------------------------------------------------------------------|-----------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 12 | Fiber, glass crutch, Polarizer scratch/folded (major defect) | $W \leq 0.03\text{mm}$ | disregard | Note1:L: Length, W: Width Note2: disregard if out of AA  |
| | | $0.03\text{mm} < W \leq 0.05\text{mm}$ $L \leq 3.0\text{mm}$ | 2 | |
| | | $0.05\text{mm} < W \leq 0.1\text{mm}$ $L \leq 3.0\text{mm}$ | 1 | |
| | | $W > 0.1\text{mm}; L > 3.0\text{mm}$ | 0 | |

13.Precautions for using LCD modules.

13.1 Safety

- (1) Do not swallow any liquid crystal, even if there is no proof that liquid crystal is poisonous.
- (2) If the LCD panel breaks, be careful not to get liquid crystal to touch your skin.
- (3) If skin is exposed to liquid crystal, wash the area thoroughly with alcohol or soap.

13.2 Storage Conditions

- (4) Store the panel or module in a dark place where the temperature is $23 \pm 5^\circ\text{C}$ and the humidity is below $45 \pm 20\% \text{RH}$.
- (5) Store in anti-static electricity container.
- (6) Store in clean environment, free from dust, active gas, and solvent.
- (7) Do not place the module near organics solvents or corrosive gases.
- (8) Do not crush, shake, or jolt the module.

13.3 Handling Precautions

- (9) Avoid static electricity, which can damage the CMOS LSI.
- (10) The polarizing plate of the display is very fragile, please handle it very carefully.
- (11) Do not give external shock.
- (12) Do not apply excessive force on the surface.
- (13) Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- (14) Do not use ketonic solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.
- (15) Do not operate it above the absolute maximum rating.
- (16) Do not remove the panel or frame from the module.

13.4 Warranty

The period is within twelve months since the date of shipping out under normal using and storage conditions.