



Tel: 0755-21010980

Web: www.yhwdisplay.com

**SPECIFICATION  
FOR  
LCD MODULE**

**Customer :** \_\_\_\_\_

**Product Model:** YH101MH4001

**Sample code:** \_\_\_\_\_

Designed by	Checked by	Approved by

**Final Approval by Customer**

<input type="checkbox"/> <b>LCM Machinery OK</b>  Checked By _____  <input type="checkbox"/> <b>LCM Display OK</b>  Checked By _____	<input type="checkbox"/> <b>LCM OK</b>  <input type="checkbox"/> <b>NG , Problem survey:</b>  Approved By _____
--	---

※The specification of "TBD" should refer to the measured value of sample . If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer.



Record of Revision

Version	Revise Date	Page	Content
Pre-Spec.01	2013/03/30		Initial Release
Pre-Spec.01	2017/09/30		变更产品型号
Fin-Spec.13	2022/01/26	7	3.4 Power Sequence
		8-10	3.5 LVDS Signal Timing Characteristics
	2022/02/25	16	7. Mechanical Drawing
		5-6	3. Operation Specifications



## Contents

1. General Specifications .....	1
2. Pin Assignment .....	2
3. Operation Specifications .....	4
3.1. Absolute Maximum Ratings .....	4
3.2. Typical Operation Conditions .....	6
3.3. Power Sequence .....	7
3.4. LVDS Signal Timing Characteristics .....	8
3.4.1. AC Electrical Characteristics .....	8
3.4.2. Timing Table .....	9
3.4.3. LVDS Data Input Format .....	10
4. Optical Specifications .....	11
5. Reliability Test Items .....	15
6. General Precautions .....	16
6.1. Safety .....	16
6.2. Handling .....	16
6.3. Static Electricity .....	16
6.4. Storage .....	16
6.5. Cleaning .....	16
7. Mechanical Drawing .....	17
8. Package Drawing .....	18
8.1. Packaging Material Table .....	18
8.2. Packaging Quantity .....	18
8.3. Packaging Drawing .....	18



## 1. General Specifications

No.	Item	Specification	Remark
1	LCD size	10.1 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	1280 × 3(RGB) × 800	
4	Display mode	Normally Black, Transmissive	
5	Dot pitch	0.0565(W) × 0.1695(H) mm	
6	Active area	216.96(W) × 135.60(H) mm	
7	Module size	229.46(W) × 149.1(H) × 2.50(D) mm	Note 1
8	Surface treatment	HC	
9	Color arrangement	RGB-stripe	
10	Interface	Digital LVDS	
11	Backlight power consumption	2.57 W	
12	Panel power consumption	1W	Note 2
13	IC	EK79202	

Note 1: Refer to Mechanical Drawing.

Note 2: Including T-con Board power consumption



## 2. Pin Assignment

A 40pin connector is used for the module electronics interface. The recommended model is F62240-H1210A manufactured by Vigorconn.

Pin No.	Symbol	I/O	Function	Remark
1	NC		No connection	
2	VDD	P	Power Supply	
3	VDD	P	Power Supply	
4	NC	---	SPI-CS FOR INX Test	
5	NC	---	SPI-SDA FOR INX Test	
6	NC	---	SPI-SCK FOR INX Test	
7	GND	P	Ground	
8	Rxin0-	I	-LVDS Differential Data Input	R0-R5, G0
9	Rxin0+	I	+LVDS Differential Data Input	
10	GND	P	Ground	
11	Rxin1-	I	-LVDS Differential Data Input	G1~G5, B0,B1
12	Rxin1+	I	+LVDS Differential Data Input	
13	GND	P	Ground	
14	Rxin2-	I	-LVDS Differential Data Input	B2-B5,HS,VS, DE
15	Rxin2+	I	+LVDS Differential Data Input	
16	GND	P	Ground	
17	RxCLK-	I	-LVDS Differential Clock Input	LVDS CLK
18	RxCLK+	I	+LVDS Differential Clock Input	
19	GND	P	Ground	
20	Rxin3-	I	-LVDS Differential Data Input	R6, R7, G6, G7, B6, B7
21	Rxin3+	I	+LVDS Differential Data Input	
22	GND	P	Ground	
23	NC	---	No connection	
24	NC	---	No connection	
25	GND	P	Ground	
26	NC	---	No connection	



27	NC	---	No connection	
28	NC	---	No connection	
29	AVDD	P	Power for Analog Circuit	
30	GND	P	Ground	
31	LED-	P	LED Cathode	
32	LED-	P	LED Cathode	
33	NC	---	No connection	
34	NC	---	No connection	
35	VGL	P	Gate OFF Voltage	
36	NC	---	No connection	
37	NC	---	No connection	
38	VGH	P	Gate ON Voltage	
39	LED+	P	LED Anode	
40	LED+	P	LED Anode	

I: input, O: output, P: Power



### 3. Operation Specifications

#### 3.1. Absolute Maximum Ratings

(Note 1)

Item	Symbol	Values		Unit	Remark
		Min.	Max.		
Power voltage	VDD	-0.5	4.0	V	
	AVDD	-0.3	18	V	
	V <sub>GH</sub>	-0.5	V <sub>GL</sub> +32	V	
	V <sub>GL</sub>	-17	-0.3	V	
	V <sub>GH</sub> -V <sub>GL</sub>	12	32	V	
Operation Temperature	T <sub>OP</sub>	-20	70	°C	
Storage Temperature	T <sub>ST</sub>	-30	80	°C	

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.



### 3.1.1. Backlight Driving Conditions

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Voltage for LED backlight	$V_L$	8.7	9.3	9.9	V	Note 1
Current for LED backlight	$I_L$	-	300	380	mA	
LED life time	-	15000	20,000	-	Hr	Note 2

Note 1: The LED Supply Voltage is defined by the number of LED at  $T_a=25^{\circ}\text{C}$  and  $I_L=300\text{mA}$ .

Note 2: The “LED life time” is defined as the module brightness decrease to 50% original brightness at  $T_a=25^{\circ}\text{C}$  and  $I_L=300\text{mA}$ . The LED lifetime could be decreased if operating  $I_L$  is larger than 300mA.



### 3.2. Typical Operation Conditions

(Note 1)

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power voltage	VDD	2.3	2.5	3.6	V	Note 2
	AVDD	8.0	8.2	8.4	V	
	V <sub>GH</sub>	14.5	15	15.5	V	
	V <sub>GL</sub>	-13.5	-13	-12.5	V	
Input logic high voltage	V <sub>IH</sub>	0.8 VDD	-	VDD	V	
Input logic low voltage	V <sub>IL</sub>	0	-	0.2 DV <sub>DD</sub>	V	

Note 1: Be sure to apply VDD and V<sub>GL</sub> to the LCD first, and then apply V<sub>GH</sub>

Note 2: VDD setting should match the signals output voltage (refer to Note 3) of customer's system board.


### 3.3. Current Consumption

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Current for Driver	I <sub>GH</sub>	1.0	1.4	1.8	uA	V <sub>GH</sub> =15V
	I <sub>GL</sub>	1.0	1.4	1.8	uA	V <sub>GL</sub> = -13V
	I <sub>VDD</sub>	26	31	36	mA	V <sub>DD</sub> =2.5V
	I <sub>AVDD</sub>	17	22	27	mA	AV <sub>DD</sub> =8.2V




### 3.4. Power Sequence

#### a. Power on:

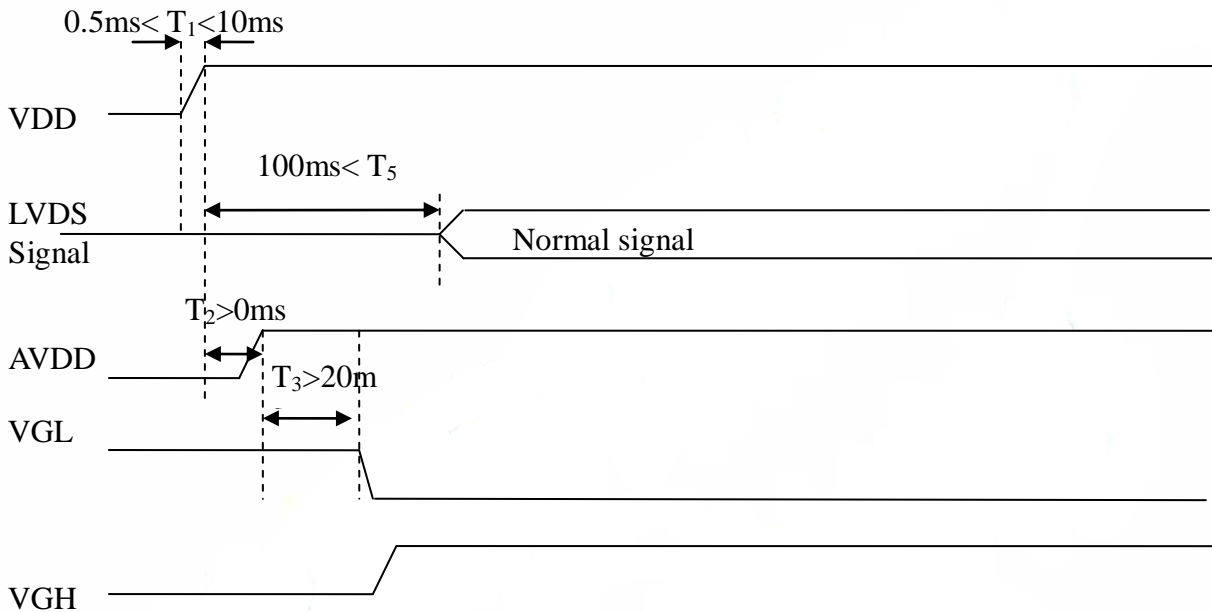

#### b. Power off:

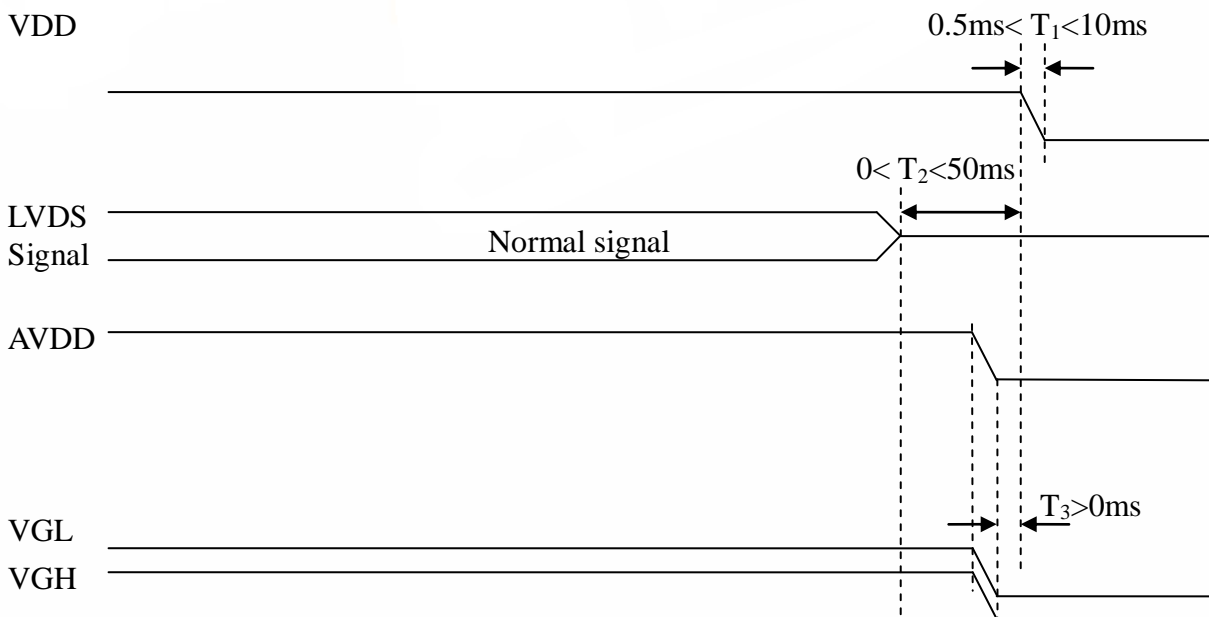


Note: VGH 電壓先于 VGL 下電或同時下電。



### 3.5. LVDS Signal Timing Characteristics

#### 3.5.1. AC Electrical Characteristics



Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
LVDS Differential input high Threshold voltage	$R_{xVTH}$	-	-	+100	mV	$R_{xVCM}=1.2V$
LVDS Differential input low Threshold voltage	$R_{xVTL}$	-100	-	-	mV	
LVDS Differential input common mode voltage	$R_{xVCM}$	0.7	-	1.6	V	
LVDS Differential voltage	$ V_{ID} $	200	-	600	mV	

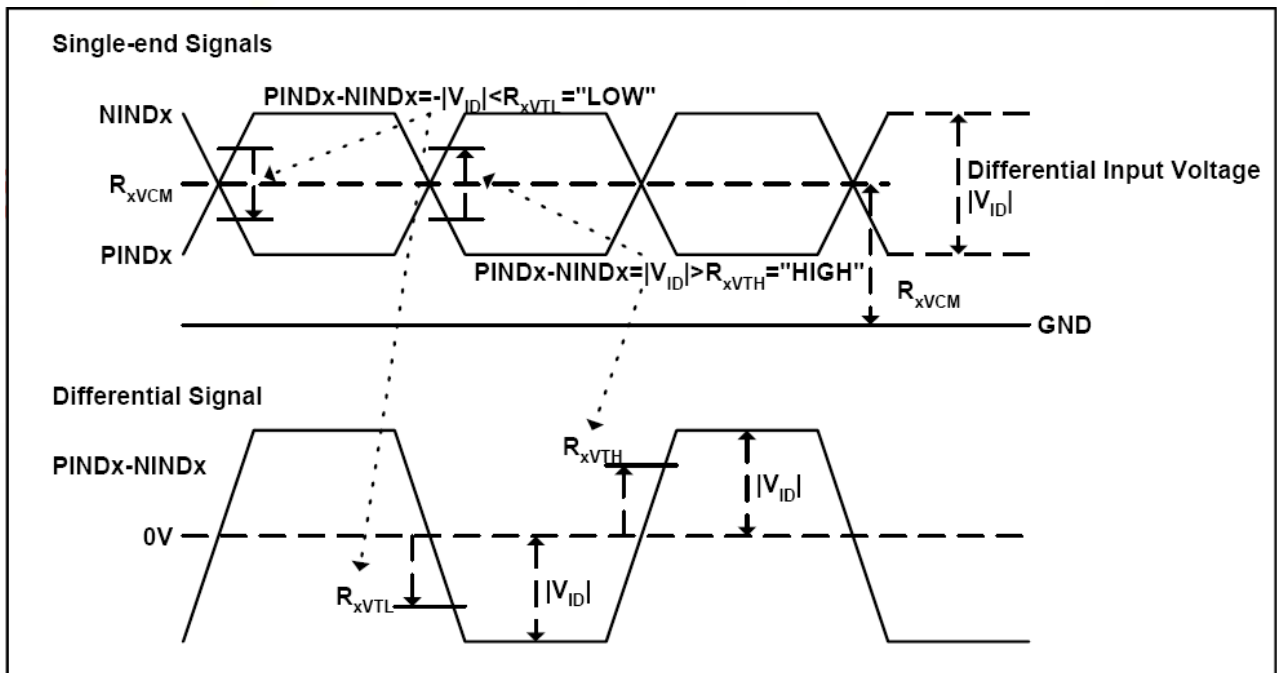




### 3.5.2. Timing Table

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Clock Frequency	1/Tc	66.3	72.4	78.9	MHz	Frame rate =60Hz
Horizontal display area	t <sub>HD</sub>	1280			Tc	
HSYNC pulse width	t <sub>HPW</sub>	2	-	40	Tc	
HSYNC back porch(with pulse width)	t <sub>HBP</sub>	88	88	88	Tc	
HSYNC front porch	t <sub>HFP</sub>	12	72	132	Tc	
Vertical display area	t <sub>VD</sub>	800			t <sub>H</sub>	
VSYNC pulse width	t <sub>VPW</sub>	2	-	20	t <sub>H</sub>	
VSYNC back porch(with pulse width)	t <sub>VBP</sub>	23	23	23	t <sub>H</sub>	
VSYNC front porch	t <sub>VFP</sub>	1	15	49	t <sub>H</sub>	

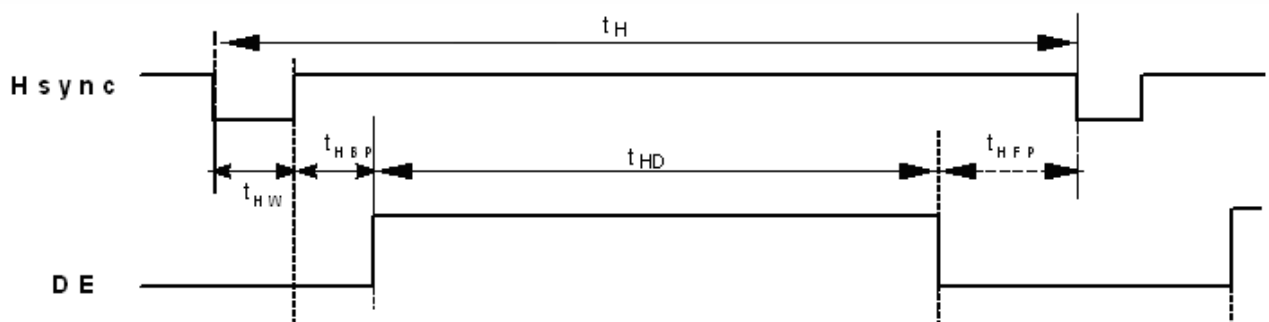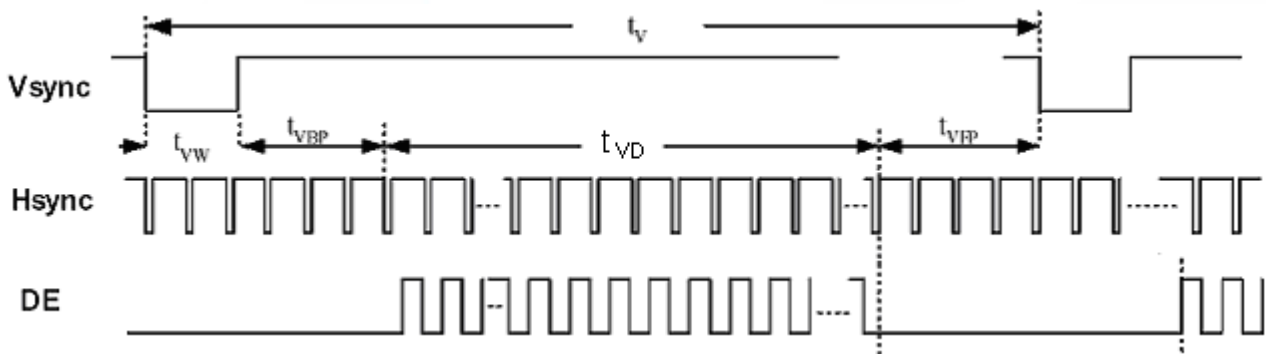



### 3.5.3. LVDS Data Input Format

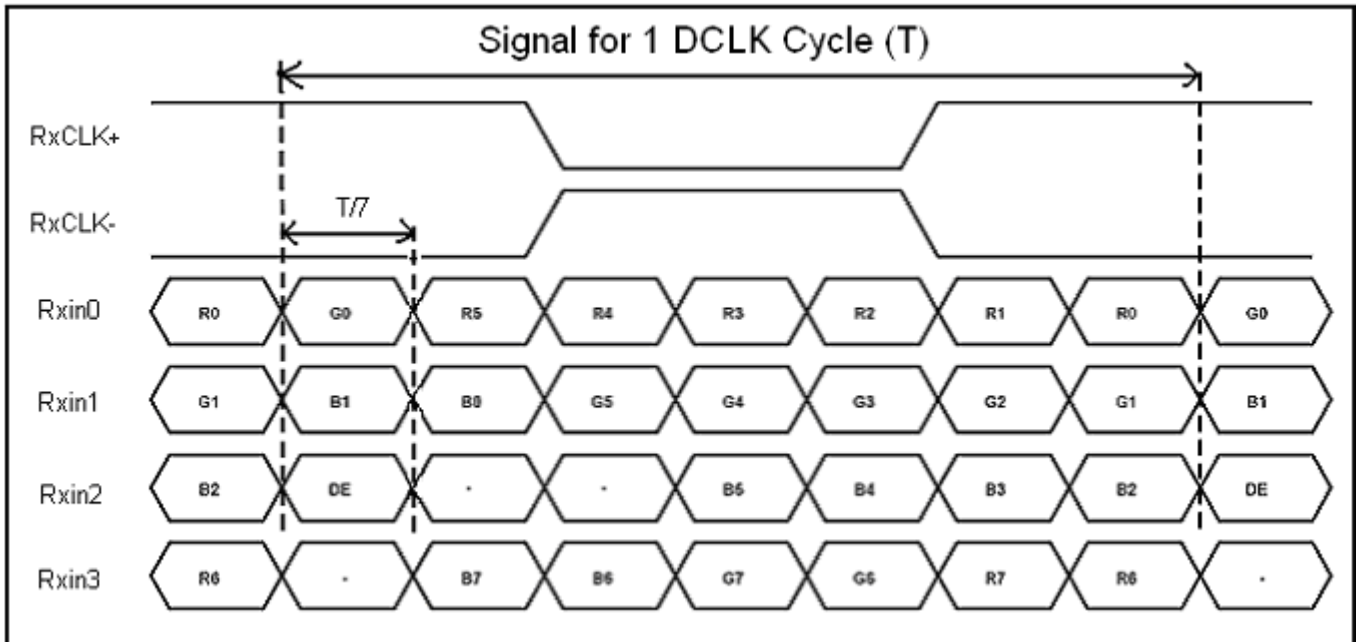



## 4. Optical Specifications

Item	Symbol	Condition	Values			Unit	Remark
			Min.	Typ.	Max.		
Viewing angle (CR≥ 10)	$\theta_L$	$\Phi=180^\circ$ (9 o'clock)	75	85	-	degree	Note 1
	$\theta_R$	$\Phi=0^\circ$ (3 o'clock)	75	85	-		
	$\theta_T$	$\Phi=90^\circ$ (12 o'clock)	75	85	-		
	$\theta_B$	$\Phi=270^\circ$ (6 o'clock)	75	85	-		
Response time	$T_{ON}$	Normal $\theta=\Phi=0^\circ$	-	10	20	msec	Note 3
	$T_{OFF}$		-	15	30	msec	Note 3
Contrast ratio	CR		600	800	-	-	Note 4
Color chromaticity	$W_X$		0.27	0.31	0.35	-	Note 2 Note 5
	$W_Y$		0.28	0.32	0.36	-	Note 6
Luminance	L		500	550	-	cd/m <sup>2</sup>	Note 6
Luminance uniformity	$Y_U$		70	75	-	%	Note 7

### Test Conditions:

1.  $V_{DD}=2.5V$ ,  $I_L=300mA$  (Backlight current), the ambient temperature is  $25^\circ C$  ..
2. The test systems refer to Note 2.



Note 1: Definition of viewing angle range

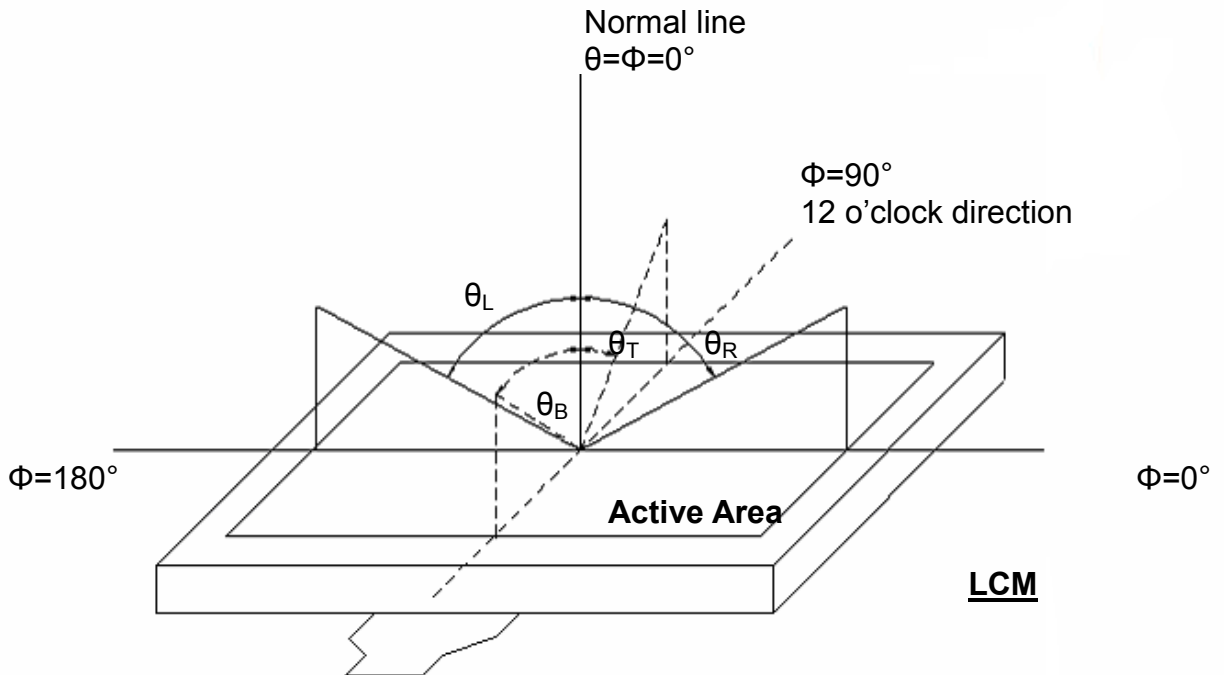


Fig. 4-1 Definition of viewing angle

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Viewing angle is measured by ELDIM-EZ contrast/Height :1.2mm, Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/ Field of view:  $1^\circ$  /Height: 500mm.)

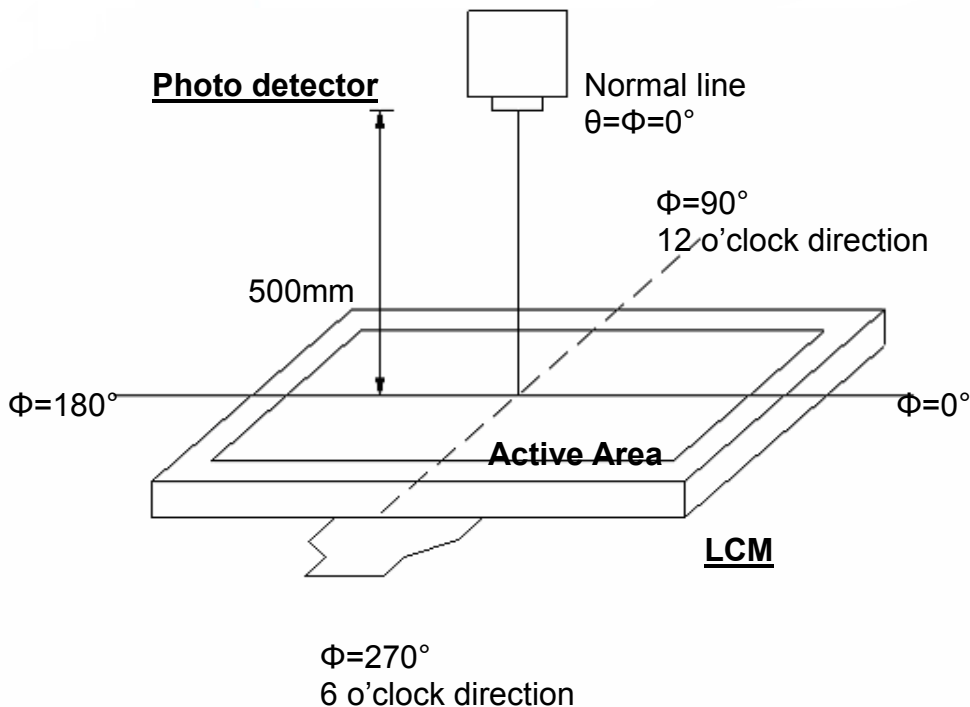


Fig. 4-2 Optical measurement system setup



Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time ( $T_{ON}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{OFF}$ ) is the time between photo detector output intensity changed from 10% to 90%.

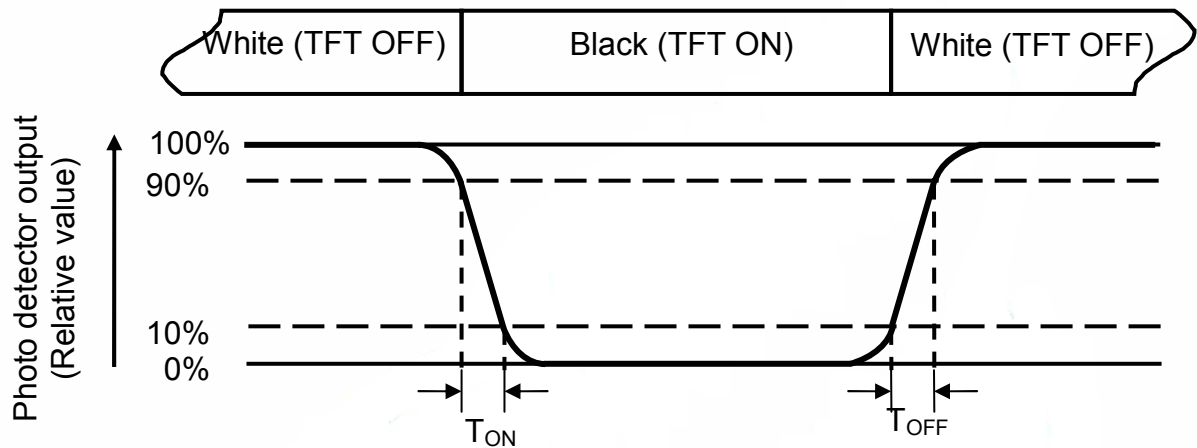


Fig. 4-3 Definition of response time

Note 4: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.


Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel. The LED driving condition is  $I_L=260\text{mA}$ .



Note 7: Definition of Luminance Uniformity

Measure the luminance of gray level 63 at 9 points

$$\delta W_{9p} = \left\{ \frac{\text{Minimum} [L(1) + L(6) + L(7) + L(8) + L(9) + L(10) + L(11) + L(12) + L(13)]}{\text{Maximum} [L(1) + L(6) + L(7) + L(8) + L(9) + L(10) + L(11) + L(12) + L(13)]} \right\} * 100\%$$

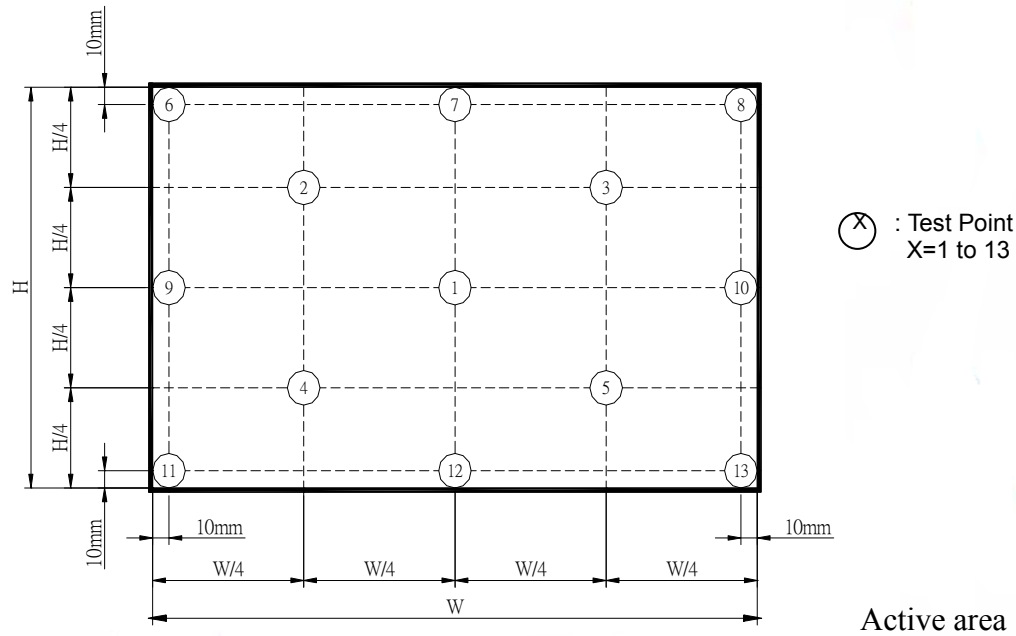





## 6. General Precautions

### 6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

### 6.2. Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
4. Keep a space so that the LCD panels do not touch other components.
5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

### 6.3. Static Electricity

1. Be sure to ground module before turning on power or operating module.
2. Do not apply voltage which exceeds the absolute maximum rating value.

### 6.4. Storage

1. Store the module in a dark room where must keep at  $25\pm 10^{\circ}\text{C}$  and 65%RH or less.
2. Do not store the module in surroundings containing organic solvent or corrosive gas.
3. Store the module in an anti-electrostatic container or bag.

### 6.5. Cleaning



1. Do not wipe the polarizer with dry cloth. It might cause scratch.
2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.




Customer Name: 客户名称:	Customer's Code: 客户料号:	BL101M35-H01	Edition: 版本号:	A0	第三视角
Approved by: 承认:	Model NO. : 公司料号:	YH101MH4005	Edition: 版本号:	A0	
Approval Date: 承认日期:	Please Confirm This Drawing On/Before 请签回此图				

深圳市宇华微科技有限公司

REV.	DATE	MODIFICATION

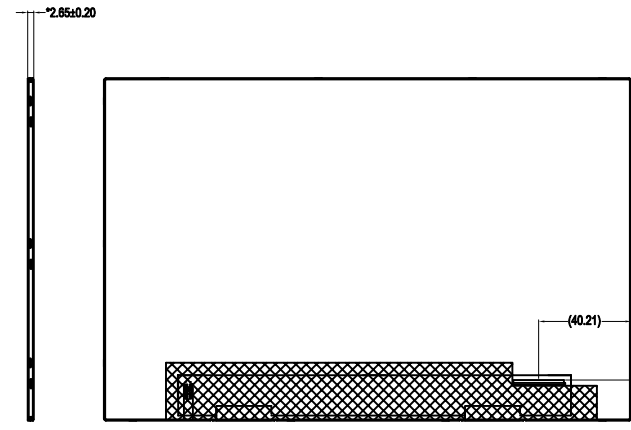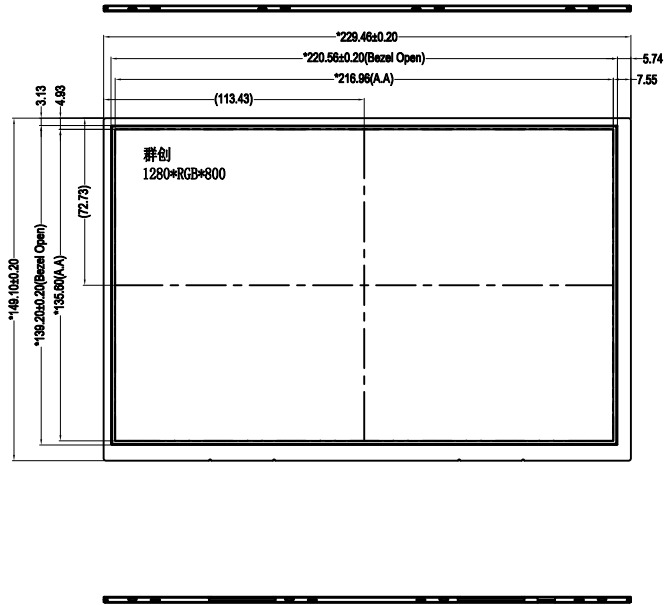

FOG透过率: 5% (TYP)





CIRCUIT DIAGRAM

RoHS

- Notes:
- Unit:mm
  - Do not scale drawing.
  - Modification rev. number
  - Mark mold cavity identification in recess approximately where indicated.
  - "\*" For important dimension; ( ) for reference dimension
  - RoHS must be complied. (Use Lead-free process)
  - 平整度控制到0.4MAX

Item(项目)	Symbol	min.	typ.	max.	Unit	Condition
Main screen 主屏 (BI)	Luminance (亮度)	Lv			cd/m <sup>2</sup>	(M-7测试值)
	Uniformity(均匀性)	Avg			%	
	Colour Coordinate (色坐标)	X Y	0.270 0.260	0.320 0.320		(原计度测试值) Lv=xxxx mcd
Main screen 主屏 (LOM)	Luminance (亮度)	Lv	500	550	cd/m <sup>2</sup>	If=300 mA (定电流测试)
	Uniformity(均匀性)	Avg	75		%	样品亮度根据 实际做出来样 品亮度定
	Colour Coordinate (色坐标)	X Y	0.270 0.300	0.330 0.360		
Forward Voltage (正向电压)	Vf	8.4	9.6	10.5	v	

\*Operating Temperature: -20~+70° C \*Storage Temperature: -30~+80° C  
(工作温度) (储存温度)



FIELD	TOLERANCES
L≤80	±0.15
80<L≤120	±0.2
120<L≤200	±0.25
200<L≤400	±0.3

公差标准	成品平面弯曲公差
ΔX≤0.025 ΔY≤0.025	边长度: L≤35 ±0.1mm 35<L≤120 ±0.135%mm 120<L≤400 ±0.5mm 角度公差 ±1°

序号	材料	材料名称	数量	原厂供应商	工艺	厚度
1.	胶框		1			
2.	导光板		1			
3.	反射片		1			
4.	下扩散		1			
5.	下BEF		1			
6.	上BEF		1			
7.	FPC双面胶		1			
8.	双面胶		1			
9.	FPC		1			
10.	LED		39			
11.	下铁框		1			
12.	上铁框		1			

背光成品图 (设计)	Design by: 贺顺超	Check by: (审查)	Approval By: (核准)	Date: (日期)	2022.03.08	Page: (页数)	1/1
---------------	-------------------	-------------------	----------------------	---------------	------------	---------------	-----