

# SPECIFICATION FOR LCD MODULE

**Customer** : \_\_\_\_\_

**Product Model:** **YH104S01-200**

**Sample code:** \_\_\_\_\_

Designed by	Checked by	Approved by

## Final Approval by Customer

<input type="checkbox"/> <b>LCM Machinery OK</b>  Checked By _____  <input type="checkbox"/> <b>LCM Display OK</b>  Checked By _____	<input type="checkbox"/> <b>LCM OK</b>  <input type="checkbox"/> <b>NG , Problem survey:</b>  Approved By _____
--	---

※The specification of “TBD” should refer to the measured value of sample . If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer.

## TABLE OF CONTENTS

REVISION STATUS.....	2
TABLE OF CONTENTS.....	3
1. GENERAL DESCRIPTION.....	4
2. MECHANICAL SPECIFICATION.....	5
3. PIN DESCRIPTION.....	6
4. ELECTRICAL CHARACTERISTICS.....	8
INPUT SIGNAL TIMING.....	11
5. OPTICAL CHARACTERISTICS.....	15
6. QUALITY ASSURANCE SYSTEM.....	18
7. PRECAUTION RELATING PRODUCT HANDLING.....	19
8. PACKAGED DRAWING.....	20


# Contents

<b>No.</b>	<b>Items</b>	<b>Page</b>
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	16
5.0	Reliability Test	21
6.0	Packing Information	23
7.0	Handling & Cautions	24
8.0	Appendix	30

# 1.0 GENERAL DESCRIPTION

## 1.1 Introduction

YH104S0 1 -200 is a color active matrix TFT LCD module using amorphous silicon TFT 's (Thin Film Transistors) as an active switching devices. This module has a 10.4 inch diagonally measured active area with SVGA resolutions (800 horizontal by 600 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors.

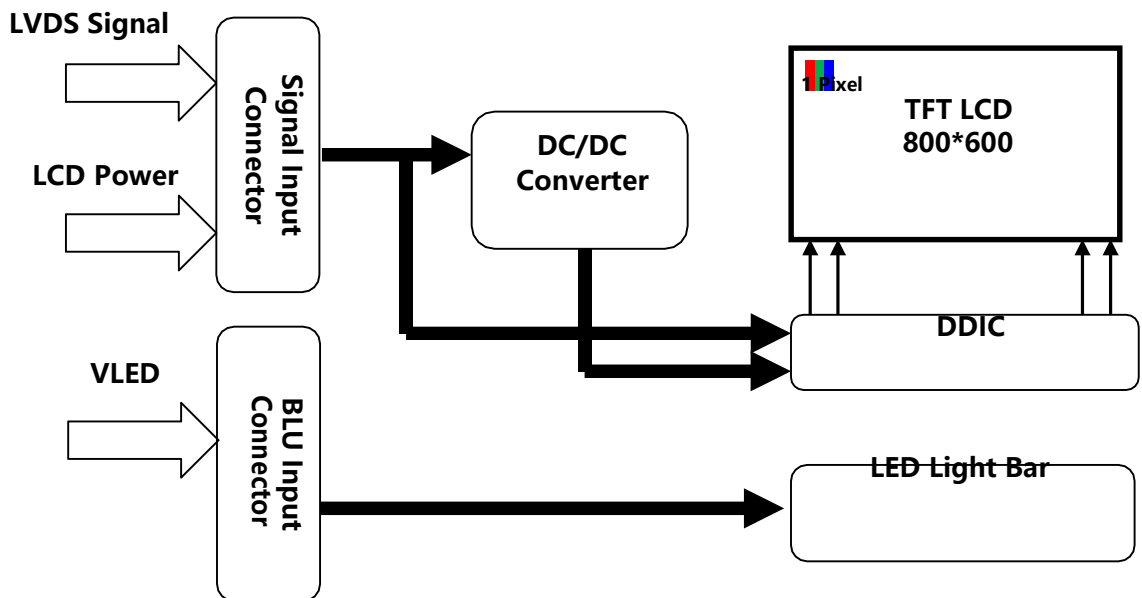

## 1.2 Features

- 0.5T Glass (Single)
- Reverse Type
- 6bit+2bit FRC LVDS data input selection
- Frame Frequency: 60hz
- High luminance and contrast ratio, low reflection and wide viewing angle
- RoHS compliant

### 1.3 Application

- Medical & Industrial application

### 1.4 General Specification

The followings are general specifications at the BA104S01-200

<Table 1. LCD Module Specifications>

Parameter	Specification	Unit	Remarks
Active Area	211.2x158.4	mm	
Number Of Pixels	800*600	pixels	
Pixel Pitch	88x264	μm	
Pixel Arrangement	Pixels RGB stripe arrangement		
Display Mode	TN, Normally White		
Display Colors	16.7M	colors	6bit+2bit FRC
Surface Treatment	AG25		
Contrast Ratio	typ 800:1		
Viewing Angle(CR>10)	typ 80/80/65/75	deg.	L/R/U/D
Response Time	typ 30, max 35	ms	
Color Gamut	55%		
Brightness	typ 500	cd/m2	
Brightness Uniformity	min 70%, typ 80%		9point
Power Consumption	LCD 0.495W Typ. BLU 1.92W Typ.	watt	
Outline Dimension	236.0(H)×176.9(V) ×5.6(Body)	mm	
Weight			
Display Orientation	Landscape Only		


## 2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Parameter		Symbol	Min.	Max.	Unit	Remarks
Power Supply	LCD Module	VDD	0	3.6	V	Ta = 25 °C
	BLU	V <sub>LED</sub>	-	18.6	V	
		I <sub>LED</sub>	-	120	mA	
Operating Temperature		T <sub>OP</sub>	-20	+70	°C	Note 1
Storage Temperature		T <sub>ST</sub>	-30	+80	°C	

Note : 1) Temperature and relative humidity range are shown in the figure below.  
Wet bulb temperature should be 39 °C max. and no condensation of water.

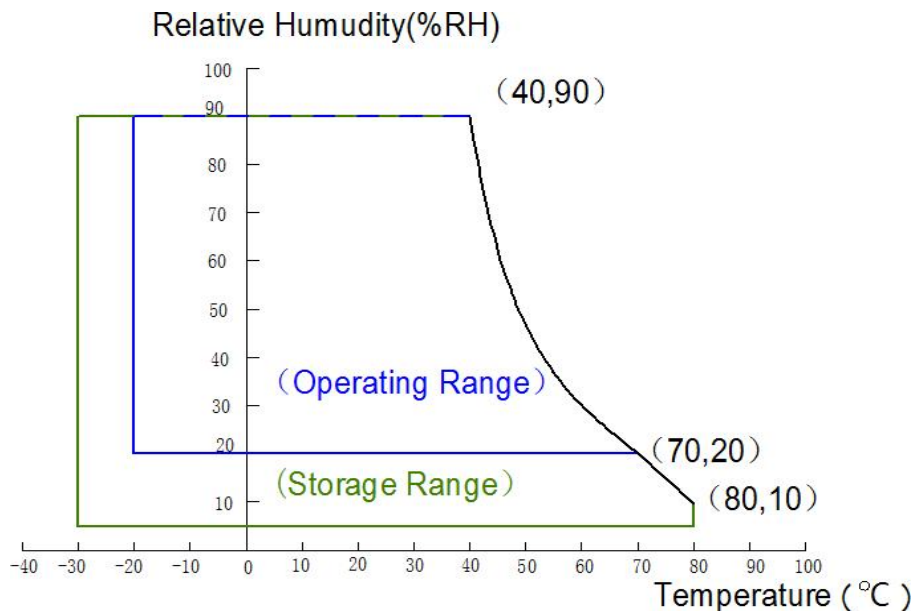

## 3.0 ELECTRICAL SPECIFICATIONS

### 3.1 TFT LCD Module

[Ta =25±2 °C]


< Table 3. LCD Module Electrical specifications >

Parameter	Symbol	Values			Unit	Notes
		Min.	Typ.	Max.		
Power Supply Voltage	VDD	3.0	3.3	3.6	V	Note 1
Power Supply Current	IDD	120	150	180	mA	
BLU Supply Voltage	V <sub>LED</sub>	-	18.6	19.8	V	
BLU Supply Current	I <sub>LED</sub>	-	100	-	mA	
Power Consumption	P <sub>D</sub>	0.4	0.495	0.59	W	Note 2
	P <sub>LED</sub>	-	-	1.98	W	
	P <sub>total</sub>	-	-	2.57	W	


Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VBAT=3.8V, Frame rate f<sub>v</sub>=60Hz and Clock frequency = 156.8MHz. Test Pattern of power supply current

a) Typ : Mosaic 8 x 6 Pattern(L0/L255)

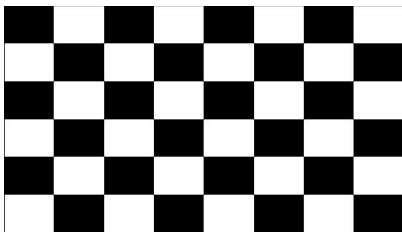

b) Max : skip subPixel(L255)

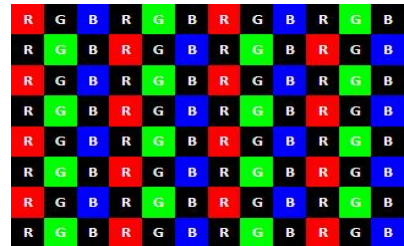

2. The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)

### 3.2 Back-Light Unit

**Table 4. LED Bar Electrical Specifications >**

[Ta =25±2 °C]

Parameter	Symbol	Values			Unit	Notes
		Min.	Typ.	Max.		
LED Supply Voltage	$V_{LED}$	-	18.6	19.8	V	
LED Supply Current	$I_{LED}$	-	120	-	mA	Note 1
Power Consumption	$P_{LED}$	-	2.23	2.37	W	
LED Quantity	QLED	-	24	-	EA	
LED Life Time	TLED	30000	-	-	Hrs	Note 2/3

Notes: 1. LED Bar:4Parallel\*6String ) ,  $I_{LED}=30mA*4=120mA$

$$P_{LED} = V_{LED} \times I_{LED} \text{ (Without LED converter transfer efficiency)}$$

- The life time of LED, 30,000Hrs, is determined as the time at which luminance of the LED is 50% compared to that of initial value at the typical LED current on condition of continuous operating at  $25 \pm 2^{\circ}C$ .
- Only under the above operating conditions could the life time of LED be guaranteed.

### 3.3 INPUT TERMINAL PIN ASSIGNMENT

This LCD employs two interface connections, a 20 pin connector is used for the LCD module electronics interface and a 2 pin connector is used for the backlight system.

#### 3.3.1 Pin assignment for LCD module

Connector : MSB24013P20\_HA(STM) or equivalent

< Table5. Pin Assignment for LCD Module Connector >

Pin No.	Symbol	Description	I/O
1	VCC	Logic Power 3.3V(Panel logic)	P
2	VCC	Logic Power 3.3V(Panel logic)	P
3	NC	Reserved for BOE VDD_MTP	-
4	SEL	VCC:8Bit;GND/NC:6Bit	-
5	RIN0-	LVDS receiver negative signal channel 0	I
6	RIN0+	LVDS receiver positive signal channel 0	I
7	GND	Ground	-
8	RIN1-	LVDS receiver negative signal channel 1	I
9	RIN1+	LVDS receiver positive signal channel 1	I
10	GND	Ground	-
11	RIN2-	LVDS receiver negative signal channel 2	I
12	RIN2+	LVDS receiver positive signal channel 2	I
13	GND	Ground	-
14	CLKIN-	LVDS receiver negative signal clock	I
15	CLKIN+	LVDS receiver positive signal clock	I
16	GND	Ground	-
17	RIN3-	LVDS receiver negative signal channel 3 (NC for 6bit LVDS input)	I
18	RIN3+	LVDS receiver positive signal channel 3 (NC for 6bit LVDS input)	I
19	NC	Reserved for BOE I2C_SDA	-
20	NC	Reserved for BOE I2C_SCL	-

### 3.3.2 Pin assignment for LED Bar

Connector : JST BHSR-02VS-1 or equivalent


< Table6. Pin assignment for LED Bar >

Pin No	Symbol	Description	Remarks
1	VLED+	Power supply	
2	VLED-	Power supply	


### 3.4 DC Specification

< Table7. DC Specification >

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Supply current	$I_{DD}$	120	150	180	mA	
<b>LVDS DC specifications</b>						
Differential input high threshold	$V_{TH}$	-	-	+100	mV	$V_{IC}=1.2V$
Differential input low threshold	$V_{TL}$	-100	-	-	mV	
LVDS common mode voltage	$V_{IC}$	0.7	-	1.6	V	
LVDS swing voltage	$V_{ID}$	$\pm 100$	-	$\pm 600$	mV	

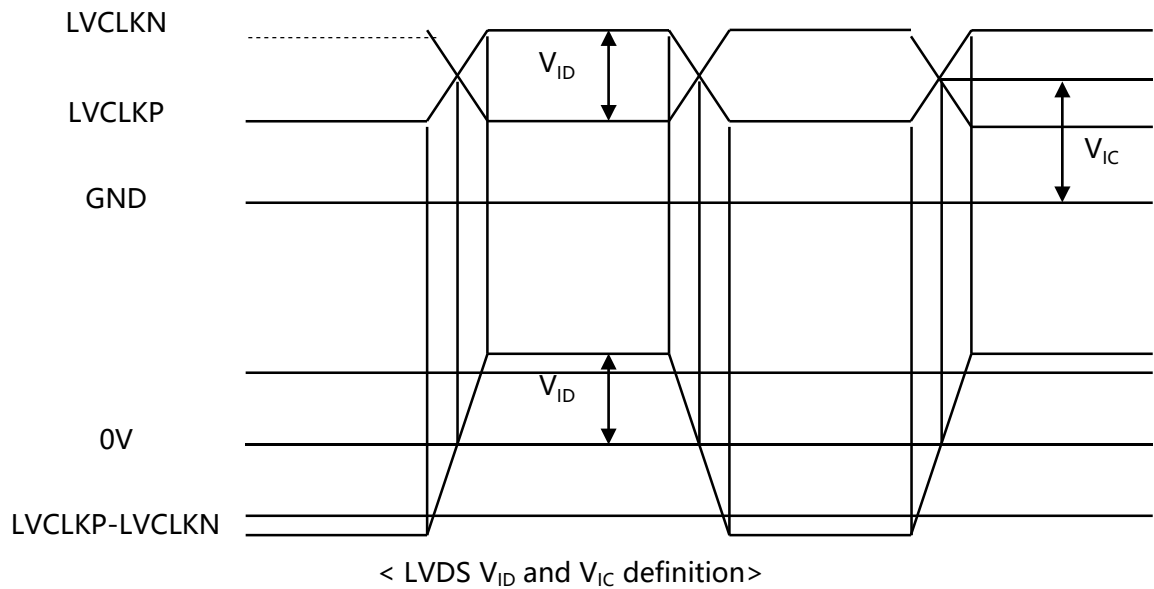

### 3.5 AC Specification

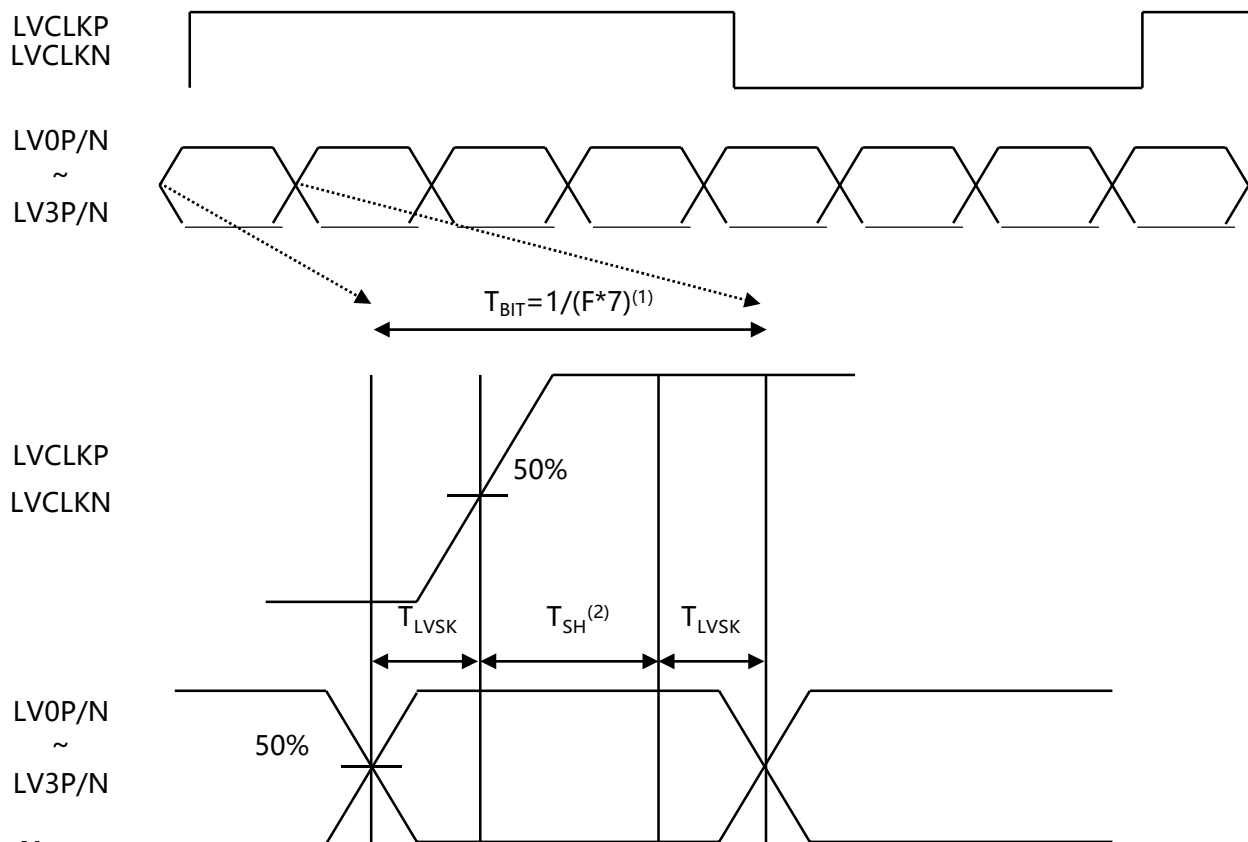

**Note:**

- (1)  $T_{BIT}$ : Data period
- (2) Internal CLK sampling data window

< LVDS channel to channel skew >


< Table8. AC Specification >

Description	Symbol	Condition	Min	Typ	Max	Unit
LVDS Input frequency	F	-	20	-	85	MHz
LVDS channel to channel skew	$T_{LVSK}$	F=65MHz $V_{IC}=1.2V$ $V_{ID}=\pm 200mV$	-600	-	+600	ps

### 3.6 Interface timing Parameter


< Table9. Timing Parameter >

Item		Symbol	min	typ	max	UNIT	
LCD	Frame Rate	-	-	60	-	Hz	
	Pixels Rate	-	37.69	33	68.1	MHz	
Timing	Horizontal	Horizontal total time	tHP	-	860	1300	t <sub>CLK</sub>
		Horizontal Active time	tHadr	800			t <sub>CLK</sub>
		Horizontal Back Porch	tHBP	-	30	255	t <sub>CLK</sub>
		Horizontal Front Porch	tHFP	-	30	245	t <sub>CLK</sub>
	Vertical	Vertical total time	tvp	620	640	806	t <sub>H</sub>
		Vertical Active time	tVadr	600			t <sub>H</sub>
		Vertical Back Porch	tVBP	10	20	100	t <sub>H</sub>
		Vertical Front Porch	tVFP	10	20	106	t <sub>H</sub>
Lane			-	1	-	Lane	

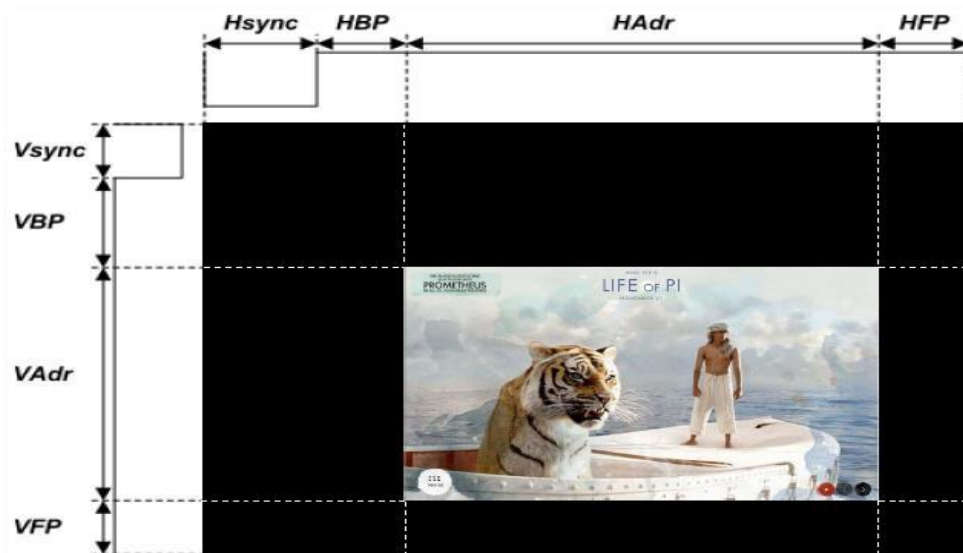

### 3.7 Power Sequence

[Ta = 25±2 °C]

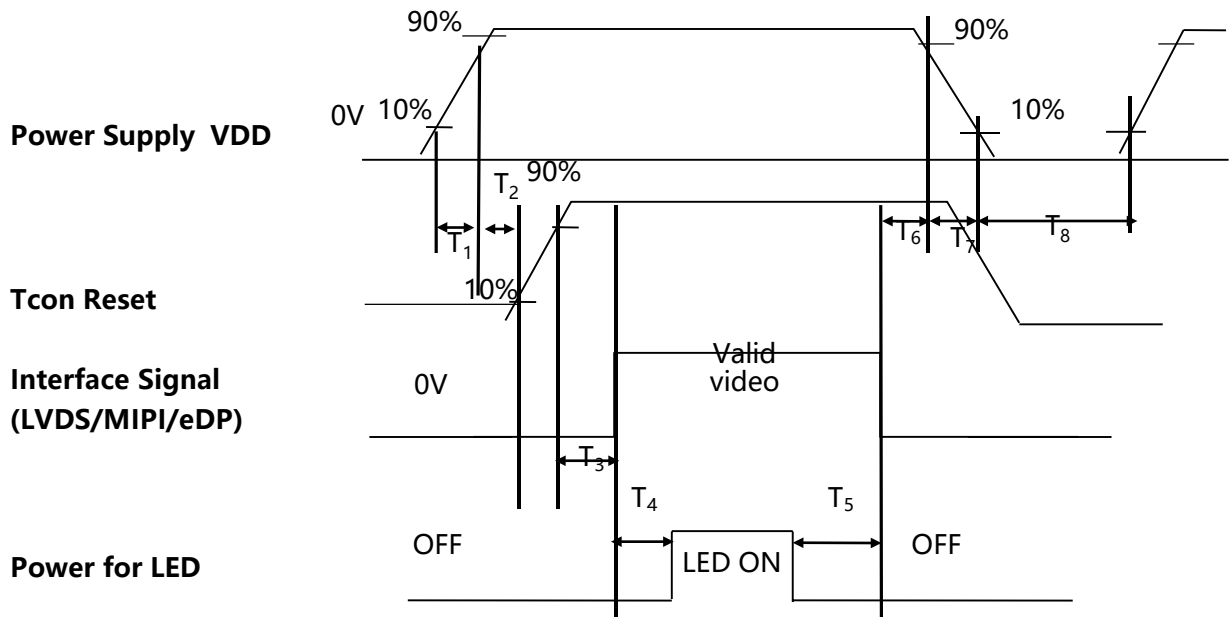


< Table10. Sequence Table >

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.1	-	5	(ms)
T2	10	-	30	(ms)
T3	5	-	100	(ms)
T4	200	-	-	(ms)
T5	200	-	-	(ms)
T6	0	-	50	(ms)
T7	0	-	10	(ms)
T8	500	-	-	(ms)



### 3.9 Input Color Data Mapping

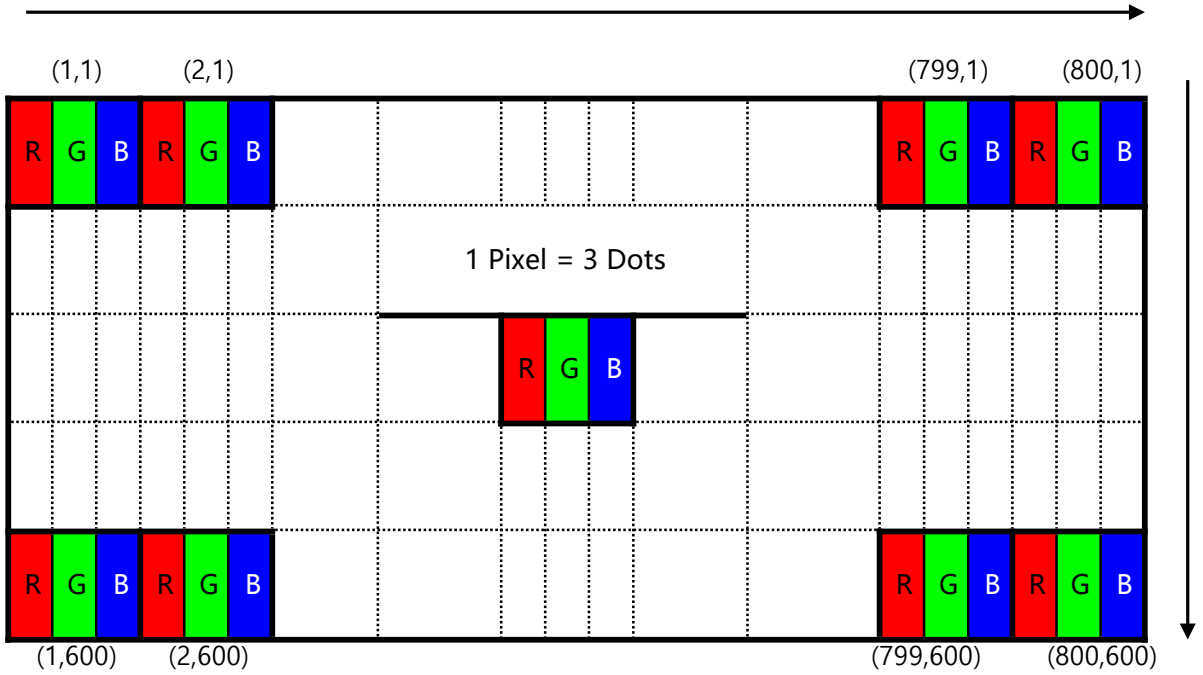

Display Position of Input Data (V-H)

## 4.0 OPTICAL SPECIFICATIONS

### 4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$ lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Gonio meter system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^\circ$ . We refer to  $\theta=0$  ( $=\theta_3$ ) as the 3 o' clock direction (the "right"),  $\theta=90$  ( $=\theta_{12}$ ) as the 12 O' clock direction ("upward"),  $\theta=180$  ( $=\theta_9$ ) as the 9 O' clock direction ("left") and  $\theta=270$  ( $=\theta_6$ ) as the 6 O' clock direction ("bottom"). While scanning  $\theta$  and/or  $\Phi$ , the center of the measuring spot on the Display surface shall stay fixed.

### 4.2 Optical Specifications

< Table11. Optical Table >

Item	Symbol	Condition	Min	Typ.	Max	Unit	Note
<b>luminance</b>	Bp	$\theta=0^\circ$	--	500	--	cd/m2	Note 1
<b>Brightness Uniformity</b>	$\Delta Bp$		70	80	--	%	Note 2
<b>Viewing Angle</b>	$\theta_L$	$Cr \geq 10$	70	80	--	deg	Note 3
	$\theta_R$		70	80	--		
	$\psi_T$		55	65	--		
	$\psi_B$		65	75	--		
<b>Contrast Ratio</b>	Cr	$\theta=0^\circ$	600	800		-	Note 4
<b>Response Time</b>	Tr+Tf	FF= $0^\circ$	-	30	35	ms	Note 5
<b>Color Coordinate of CIE1931</b>	Rx	$\theta=0^\circ$	0.587	0.617	0.647	-	Note 6
	Ry		0.321	0.351	0.381		
	Gx		0.282	0.312	0.342		
	Gy		0.561	0.591	0.621		
	Bx		0.120	0.150	0.180		
	By		0.095	0.125	0.155		
	Wx		0.254	0.284	0.314		
	Wy		0.290	0.320	0.350		
<b>NTSC Ratio</b>	NTSC	CIE1931	50	55	--	%	Note 7
<b>Polarization Direction of Front Polarizer</b>	PdF			$45^\circ$		deg	Note 8
<b>Polarization Direction of Rear Polarizer</b>	PdR			$45^\circ$		Deg	
<b>Gray inversion angle</b>				6点钟			Note 9





### Note 6: Color Coordinates of CIE 1931


The test condition is at ILED=100mA and measured on the surface of LCD module at 25°C.

Measurement equipment:CS2000 or similar equipments

The Color Coordinate (CIE 1931) is the measurement of the center of the display shown in below figure.


### Note 7: Definition of Color of CIE Coordinate and NTSC Ratio.

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

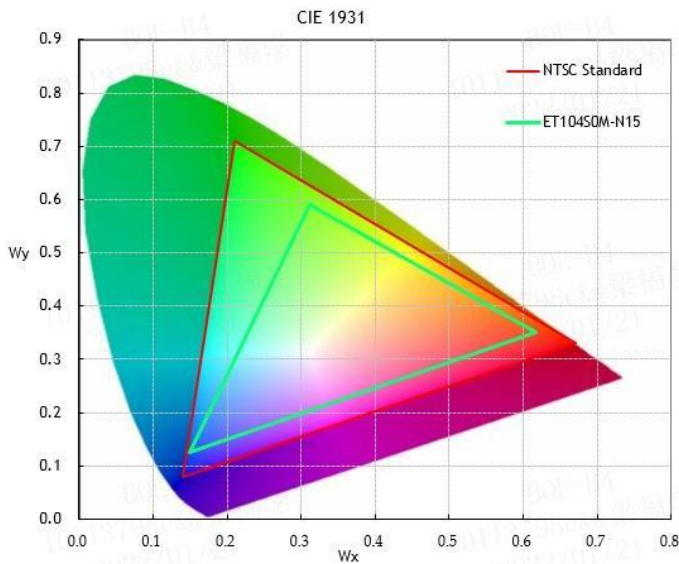


### Note 8: Polarization Direction Definition

- Viewing direction is normal user viewing direction which is vertical to the display surface
- The polarizer which is closer to viewer is defined as Front Polarizer
- The polarizer which is on the rear side of viewer is defined as Rear Polarizer
- The X axis is defined as parallel line to top & bottom sidelines of the Active Area
- PdF which is marked in blue arrow is polarization degree of Front polarizer
- PdR which is marked in red arrow is polarization degree of Back polarizer
- The polarization degree parameter must be indicated in range of 0deg to 180deg according to above definition

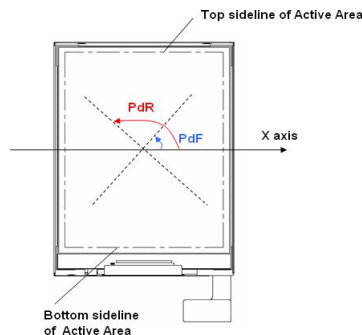

**Note 9: Definition of gray inversion angle**

- Refer to the graph of note 9.
- Using luminance test method.
- Test pattern : 128 gray
- If the viewing direction is 12 o' clock ,then test the luminance while  $\theta = -60^\circ, \theta = -50^\circ, \theta = -40^\circ, \theta = -30^\circ, \theta = -20^\circ, \theta = -10^\circ, \theta = 0^\circ, \theta = 10^\circ, \theta = 20^\circ, \theta = 30^\circ, \theta = 40^\circ, \theta = -50^\circ, \theta = 60^\circ$ . The luminance test as figure below:

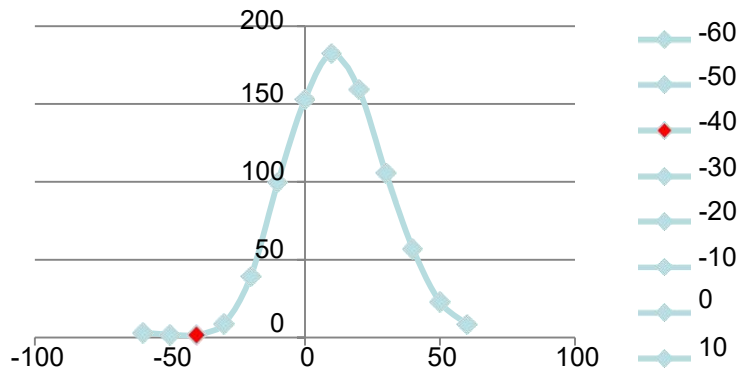

## 5.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.


**<Table 12. Reliability Test Parameters >**

No	Test Items	Conditions
1	HAST	110°C、 85%RH、 0.122Mpa, 8hr
2	High temperature & high humidity (storage test)	60°C, 90%RH, 240hr
3	High temperature storage test	80°C, 240hr
4	Low temperature storage test	-30°C, 240hr
5	High temperature & high humidity (operation test)	60°C, 90%RH, 240hr
6	Low temperature operation test	-20°C, 240hr
7	High temperature operation test	70°C, 240hr
8	Thermal Shock Test	-40°C~85°C, 1hr/cycle, 100cycle
9	PCT	121°C, 100%RH, 2atm, 12hr
10	ESD	150pF, 330Ω, ±6kV(Contact), ±8kV (Air)
11	Packing VIB	1.47G, 1-200hz, X, Y, ±Z, 30min/Axis

Remark : Vertical line appear when the temperature is below 10°C



## 6.0 PACKING INFORMATION(产品形态: LCM )

### Packing procedure:

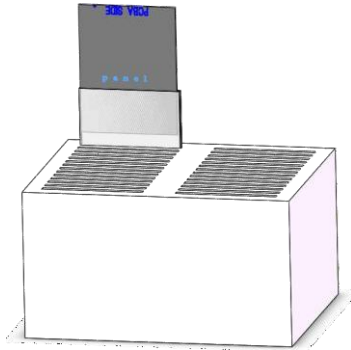

- Put 1pcs Panel into PE Bag
- Crimp PE Bag opening
- Insert 1pcs panel horizontally into the slot
- 28pcs Panel /EPE Box

- Put 1pcs EPE cover upon EPE box
- Put EPE Box& EPE cover into Inner Box
- 28pcs Panel /Inner Box

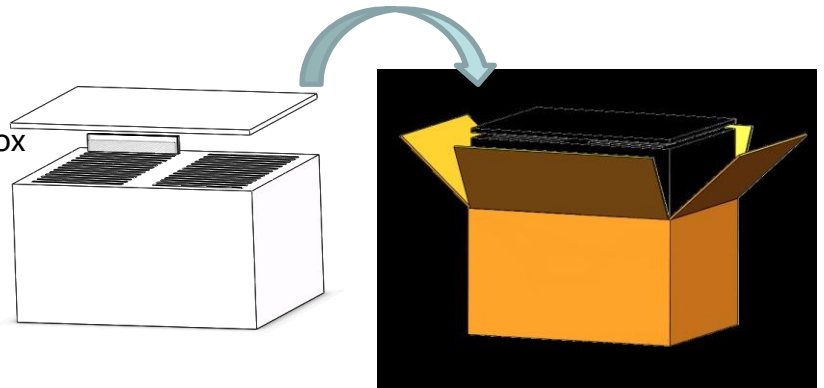

- 4 layers/ Pallet
- 4 boxes/ Layer
- 448pcs Panel / Pallet

### 6.1 Packing Note(产品形态: LCM)

- Box Dimension: \*\*\*mm(W) x \*\*\*mm(D) x \*\*\*mm(H)
- Package Quantity in one Box: 28pcs

## 7.0 Handling & Cautions

Please pay attention to the followings when you use this TFT LCD Module.

### 7.1 Mounting Precautions

- Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- You must mount a module using specified mounting holes (Details refer to the drawings).
- You should consider the mounting structure so that uneven force (ex. Twisted stress, Concentrated stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- Do not apply mechanical stress or static pressure on module; Abnormal display cause by pressing some parts of module during assembly process , do not belong to product failure, the press should be agreed by two sides.
- Determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- Do not apply mechanical stress or static pressure on module , and avoid impact, vibration and falling.
- Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- Protection film for polarizer on the module should be slowly peeled off before display.
- Be careful to prevent water & chemicals contact the module surface.
- You should adopt radiation structure to satisfy the temperature specification.
- Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.

Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)

- When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzine. Normal-hexane & alcohol is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene , because they cause chemical damage to the polarizer.
- Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- This module has its circuitry PCB' s on the rear side and Driver IC, should be handled carefully in order not to be stressed.
- Avoid impose stress on PCB and Driver IC during assembly process ,Do not drawing, bending, COF package & wire.
- Do not disassemble the module.

## 7.2 Operating Precautions

- Do not connector or disconnect the cable to/from the Module at the "Power On" Condition.
- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the module would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- Do not allow to adjust the adjustable resistance or switch.
- The electrochemical reaction caused by DC voltage will lead to LCD module degradation, so DC drive should be avoided.
- The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipment to protect against static electricity.
- Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

- The cables should be as short as possible between System Board and PCB interface.
- Connectors are precision devices to transmit electrical signals, and operators should plug in parallel.
- Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.

### **7.3 Electrostatic Discharge Precautions**

- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc.
- Do not close to static electricity to avoid product damage.
- Do not touch interface pin directly.

### **7.4 Precautions for Strong Light Exposure**

- Do not leave the module operation or storage in Strong light . Strong light exposure causes degradation of polarizer and color filter.

## 7.5 Precautions for Storage

### A. Atmosphere Requirement

ITEM	UNIT	MIN	MAX
Storage Temperature	(°C)	5	40
Storage Humidity	(%rH)	40	75
Storage Life	6 months		
Storage Condition	<ul style="list-style-type: none"><li>• The storage room should be equipped with a dark and good ventilation facility.</li><li>• Prevent products from being exposed to the direct sunlight, moisture and water.</li><li>• The product need to keep away from organic solvent and corrosive gas.</li><li>• Be careful for condensation at sudden temperature change.</li><li>• Storage condition is guaranteed under packing conditions.</li></ul>		

### B. Package Requirement

- The product should be placed in a sealed polythene bag.
- Product Should be placed on the pallet, Which is away from the floor, Be cautions not to pile the product up.
- The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- As the original protective film, do not use the adhesive protective film to avoid change of Pol color and characteristic.

## 7.6 Precautions for protection film

- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- People who peeled off the protection film should wear anti-static strap and grounded well.

## 7.7 Appropriate Condition for Commercial Display

-Generally large-sized LCD modules are designed for consumer applications . Accordingly, long-term display like in Commercial Display application, can cause uneven display including image sticking. To optimize module's lifetime and function, several operating usages are required.

### 1. Normal operating condition

- Temperature:  $20\pm 15^{\circ}\text{C}$
- Operating Ambient Humidity :  $55\pm 20\%$
- Display pattern: dynamic pattern (Real display)
- Well-ventilated place is recommended to set up Commercial Display system

### 2. Special operating condition

#### a. Ambient condition

- Well-ventilated place is recommended to set up Commercial Display system.

#### b. Power and screen save

- Periodical power-off or screen save is needed after long-term display.

c. As the low temperature, the response time is greatly delayed. As the high temperatures (higher than the operating temperature) the LCD module may turn black screen. The above phenomenon cannot explain the failure of the display. When the temperature returns to the normal operating temperature, the LCD module will return to normal display.

d. When expose to drastic fluctuation of temperature (hot to cold or cold to hot ) ,the LCD module may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD module 's surface which may affect the operation of the polarizer and LCD module .

e. Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.

f. Product reliability and functions are only guaranteed when the product is used under right operation usages. If product will be used in extreme conditions such as high temperature, high humidity, high altitude, special display images, running time, long time operation, outdoor operation, etc. It is strongly recommended to contact BOE for filed application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stock market and controlling systems.

3. Operating usages to protect against image sticking due to long-term static display.
  - a. Suitable operating time: under 20 hours a day.
  - b. Static information display recommended to use with moving image.
    - Cycling display between 5 minutes' information(static) display and 10 seconds' moving image.
  - c. Background and character (image) color change
    - Use different colors for background and character, respectively.
    - Change colors themselves periodically.
  - d. Avoid combination of background and character with large different luminance.
    - 1) Abnormal condition just means conditions except normal condition.
    - 2) Black image or moving image is strongly recommended as a screensave
4. Lifetime in this spec. is guaranteed only when Commercial Display is used according to operating usages.

## **7.8 Other Precautions**

### **A. LC Leak**

- If the liquid crystal material leaks from the panel, it is recommended to wash the LC with acetone or ethanol and then burn it.
- If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- If LC in mouth, mouth need to be washed, drink plenty of water to induce vomiting and follow medical advice.
- If LC touch eyes, eyes need to be washed with running water at least 15 minutes.


### **B. Rework**

- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

# 8.0 APPENDIX


## Mechanical Drawing

### Drawing Attachment: Landscape Front View

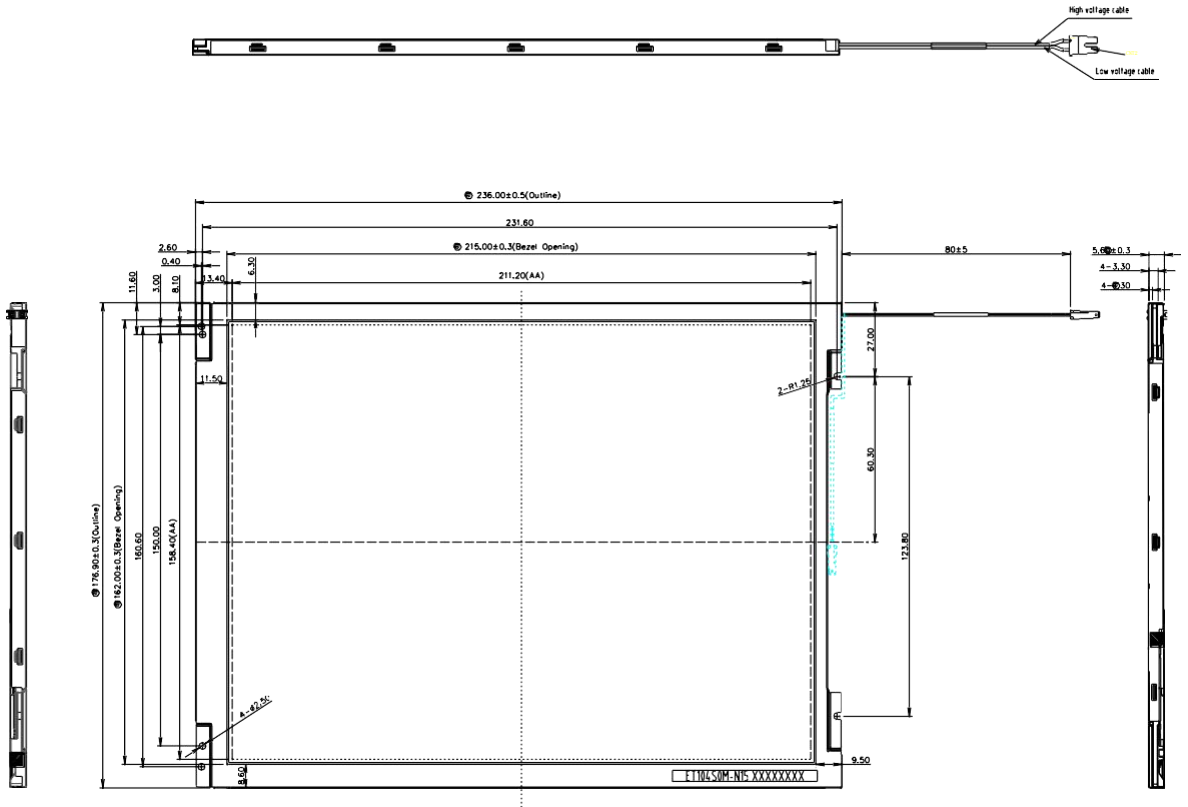

# Mechanical Drawing

Drawing Attachment: Landscape Back View

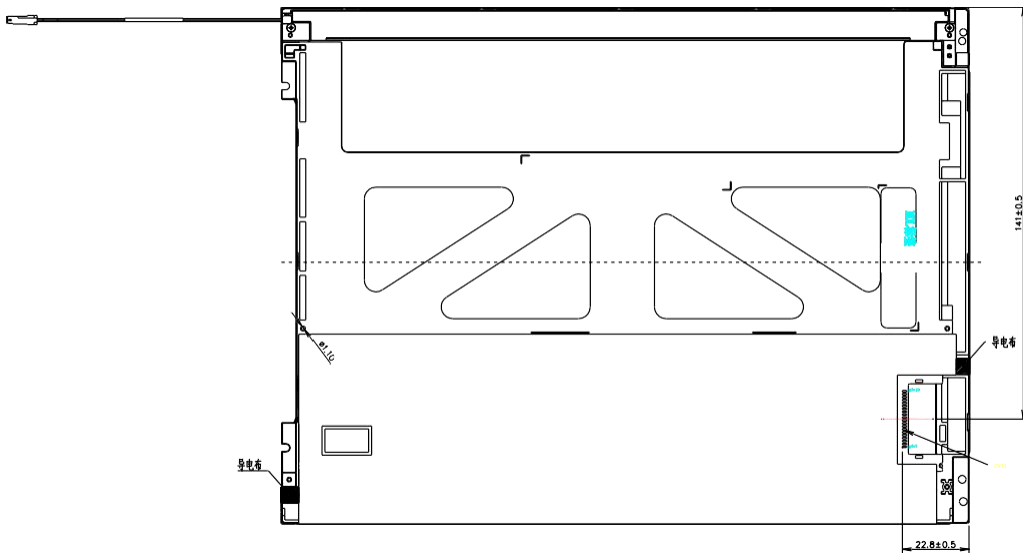

- 1.Connector 1: MSB24013P20\_HA
- 2.OPERATING TEMP: -20°C TO 70°C
- 3.STORAGE TEMP: -30°C TO 80°C