


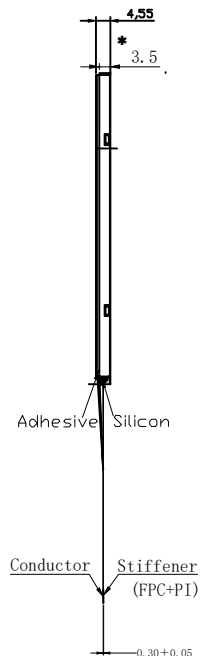
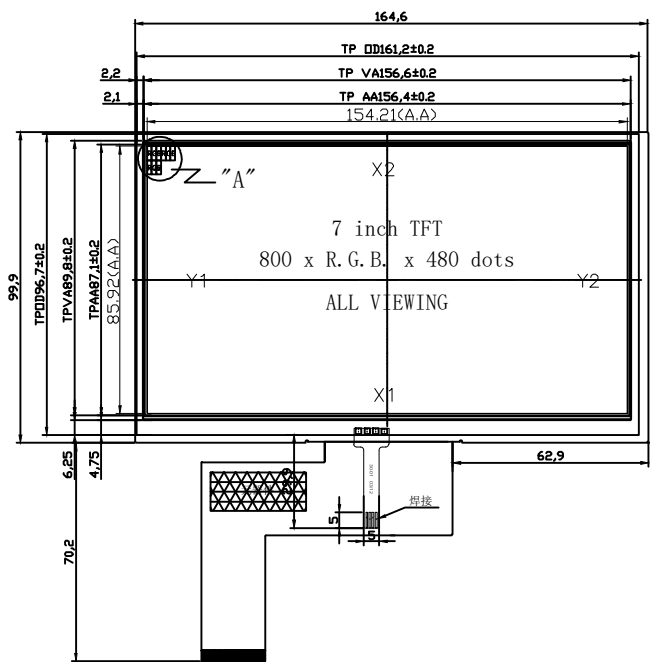




REV.	DESCRIPTION	REVISER	DATE
V0	NEW	ALECK	20201117
V1	修正铁框VA	ALECK	20201120



靠左上角组装 靠左上角组装

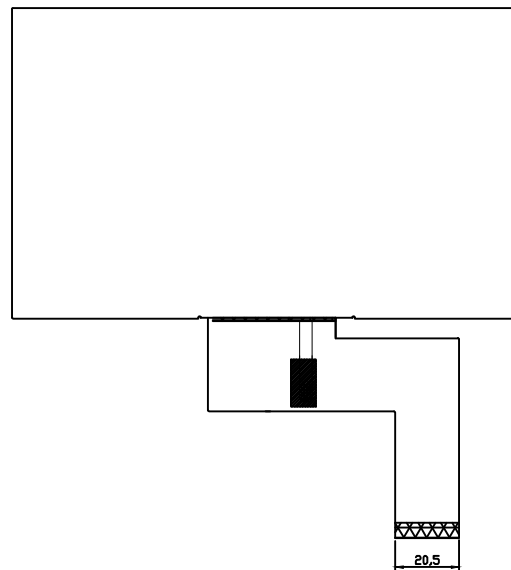

PIN:	SYMBLE
1	VLED-
2	VLED+
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC/XR
38	
39	NC/XL
40	NC/YU

NOTES:

- 1.DISPLAY TYPE: 7.0" TN TFT T
- 2.Luminance: 300 cd/m2 (Type)
- 3.Uniformity: 75%(Min) 80%(Type)
- 4.OPERATING TEMP: -20° C~+70° C
- 5.STORAGE TEMP: -30° C~+80° C
- 6.UNMARKER TOLERANCE: ±0.20
- 7.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

# 深圳市宇华微科技有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER :		SHEET:	1 Of 1
DESIGN BY:				YCY070		DRAWING DESCRITUON:	MODEL
CHECKED BY:							
APPROVED BY:					PROJECTION		